

# NERIN GOOSENECK FREESTANDING TUB FAUCET - BRUSHED NICKEL

SKU: 350645  
Code: SH350645



## FEATURES

Material: Metal construction for strength and durability  
Installation Type: Freestanding  
Flow Rate: 2.4 gpm (9.1 L/min) @ 20 psi  
Hand Shower Flow Rate: 2.0 gpm (7.6 L/min) @ 80 psi  
Spray Type: Full  
Cartridge Type: Ceramic Disc  
Swivel Spout: No

IAPMO, ASME A112.18.1/CSA B125.1, LISTED ID: 516004




## ADDITIONAL FEATURES

- Constructed of high quality materials.
- Freestanding design. Mounts to wood or tile floor with included mounting plate.
- 1/2" NPT connection under floor.
- Faucet has contemporary cross handles, diverter valve, 7-1/2" hand shower, and cradle.
- Underfloor access is required for proper installation. Installation on a concrete slab will require cutting and concrete removal.

REVISED 5/16/2024

# NERIN GOOSENECK FREESTANDING TUB FAUCET - BRUSHED NICKEL

SKU: 350645  
Code: SH350645

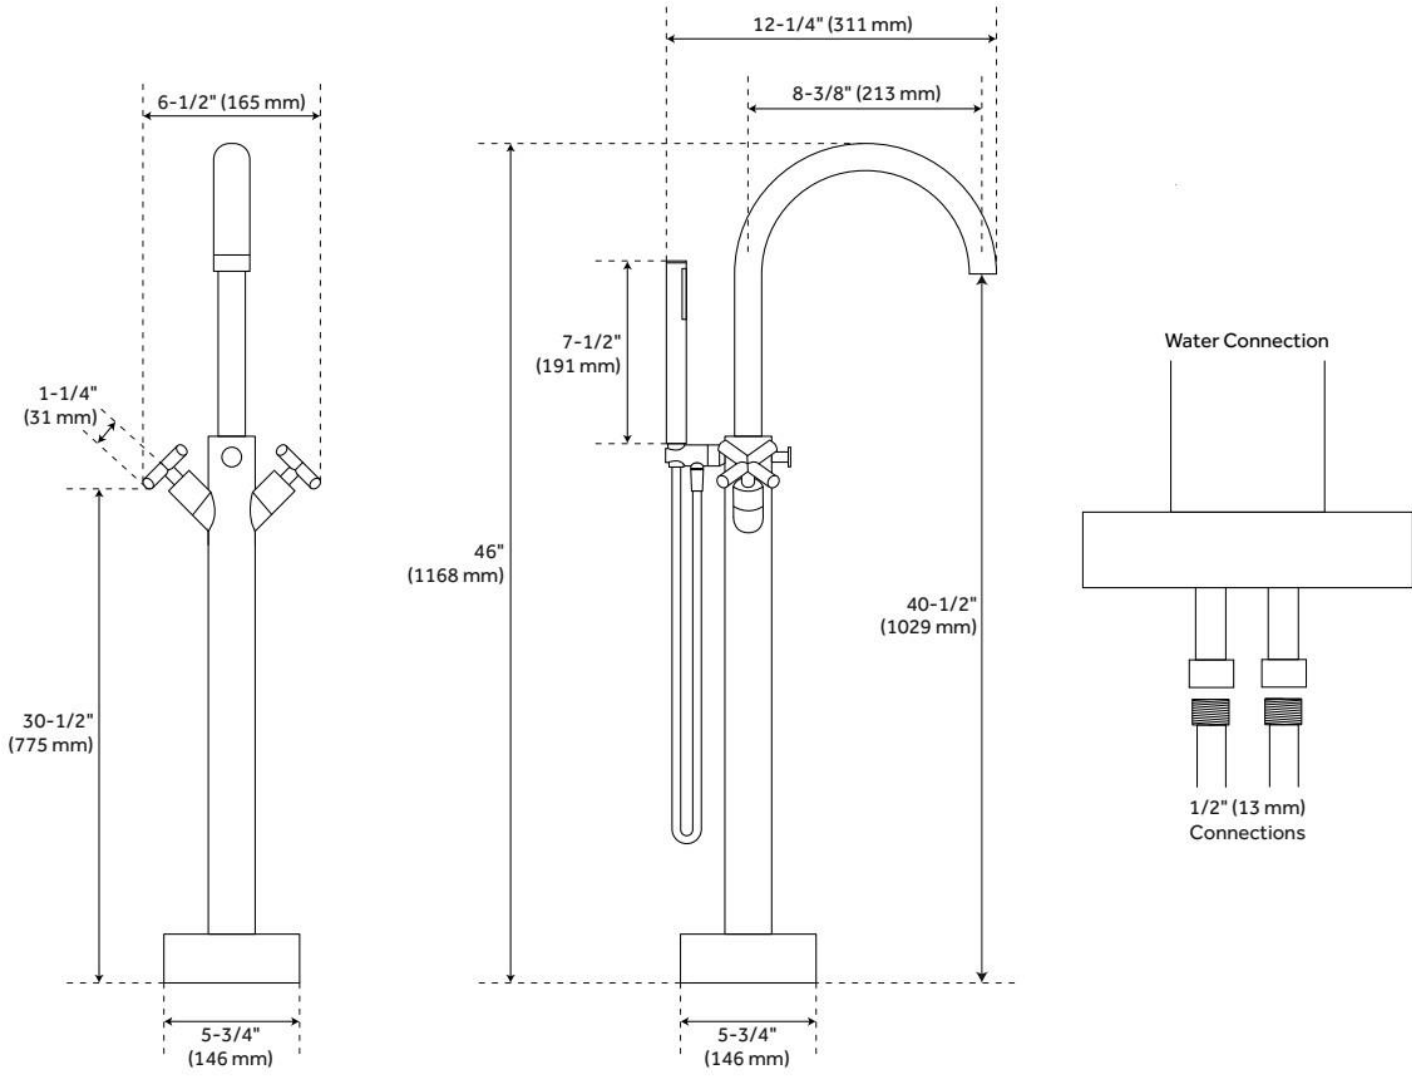

REVISED 5/16/2024