72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB -WHITE

SKU: 447036 Code: SHSKW7236



FEATURES

Tub Material: Acrylic Product Finish: White Shape: Rectangle

Tub Drain Placement: End

Drain Included: No

Water Depth to Overflow: 18" Water Capacity (Gallons): 83

Built-In Adjusters: No

Tub Weight Uncrated (lbs): 136

ASME A112.19.7/CSA B45.10, CSA B45.5/IAPMO Z124, CSA C22.2 No. 218.2, Massachusetts Accepted, UL 1795, LISTED ID: MIRSKX7236XX









ADDITIONAL FEATURES

- All dimensions ($\pm 1/2$ ").
- Can be installed for undermount applications.
- 83-gallon (314.2-Liters) operating capacity.
- Textured slip-resistant bottom.
- Pre-leveled base.
- A dual-mount design, this can be installed as a drop-in or undermount tub.
- Intuitive electronic control pad.
- Whirlpool 8 Strategically placed air jets move water with increased pressure for an invigorating bathing experience.
- Whirlpool system uses a powerful 1.75hp, 10.9 amp whirlpool pump.
- Safety Suction: Meets all requirements of durability and clog-resistance through standard testing.
- Optional Quick Connect Drop-In Drain Kit Includes:
 - Floor Plate, 1-1/2" PVC Pipe, 2" x 1-1/2" Trap Adapters, 1 Brass Threaded, 1 Brass Unthreaded Tailpiece and Plug.
 - Installs above your subfloor, but underneath your cement floor or tile, so you do not need access below the fixture. REVISED 6/27/2024

72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB - WHITE

SKU: 447036 Code: SHSKW7236

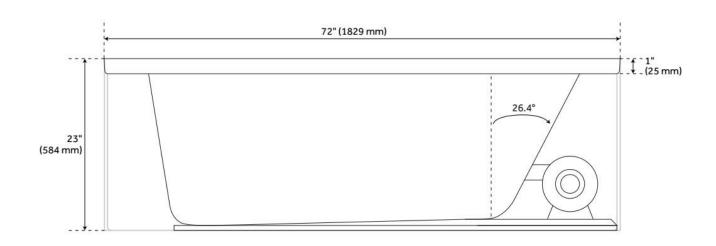

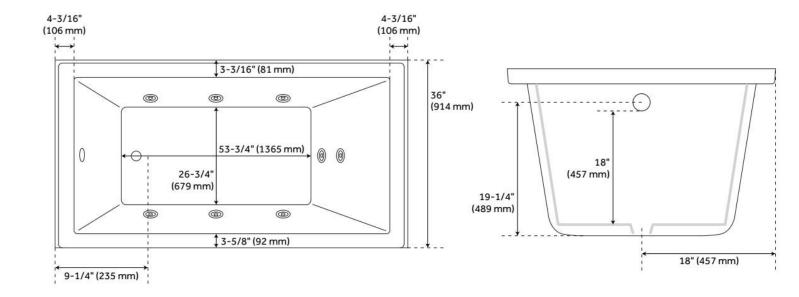

REVISED 6/27/2024

72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB - WHITE

SKU: 447036 Code: SHSKW7236

COMPONENTS LIST

• Powerful whirlpool pump with variable flow device

INSTALLATION

- Whirlpool unit requires dedicated 20 Amp, 120V service
- You must provide a receptacle with a 20 Amp configuration
- \bullet Electrical outlet must be mounted 4" (101mm) above the floor line and 12" max (305mm) inside from the edge of the bathtub, or in accordance with local building and electrical codes


INTEGRATED CONTROL PANEL

• Whirlpool Baths: Equipped with on/off switch actuator. Each depression of the switch will activate the pump

INSIDE OF BATH


 (8) HIGH-FLOW DIRECTIONAL AND VOLUME-ADJUSTABLE WHIRLPOOL JETS



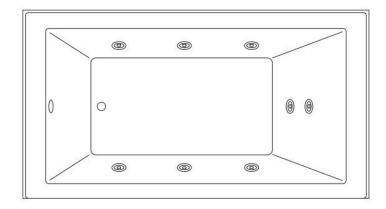

ELECTRICAL CONFIGURATIONS

WHIRLPOOL CIRCUIT WITH OPTIONAL HEATER

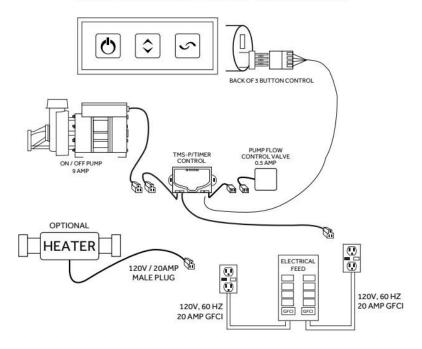

REVISED 6/27/2024