## 60" X 30" SITKA ACRYLIC ALCOVE WHIRLPOOL TUB -WHITE

SKU: 948062-WP Code: SHSKW6030



#### FEATURES

Design: Modern Product Finish: White Material: acrylic Length: 60" Width: 30" Height: 20-3/4" **Overflow Hole: Yes** Water Depth To Overflow: 14-1/2" Interior Treatment: Smooth Faucet Included: No Shape: Rectangle Tub Overflow: Yes Tub Material: Acrylic Tub Interior Length: 44-7/8" Tub Interior Width: 20-1/4" Tap Deck: No Faucet Drillings: No Drillings Built-In Adjusters: Yes Tub Weight Uncrated (lbs): 213 Tub Weight Crated (lbs): 226


## 60" X 30" SITKA ACRYLIC ALCOVE WHIRLPOOL TUB -WHITE


SKU: 948062-WP Code: SHSKW6030



### **ADDITIONAL FEATURES**

- All dimensions (± 1/2").
- Textured slip-resistant bottom.
- Pre-leveled base.
- 42-gallon (159-Liters) operating capacity.
- Intuitive electronic control pad.
- 8 Strategically placed air jets move water with increased pressure for an invigorating bathing experience.
- Whirlpool system uses a powerful 1.75hp, 10.9 amp whirlpool pump.
- Integral tile flange and skirt with removable access pane.
- Safety Suction: Meets all requirements of durability and clog-resistance through standard testing.
- Pre-wired for simple plug-in installation.
- Optional Quick Connect Drop-In Drain Kit Includes:
  - Floor Plate, 1-1/2" PVC Pipe, 2" x 1-1/2" Trap Adapters, 1 Brass Threaded, 1 Brass Unthreaded Tailpiece and Plug.
  - Installs above your subfloor, but underneath your cement floor or tile, so you do not need access below the fixture.
- ABS drain version available if needed for your installation.

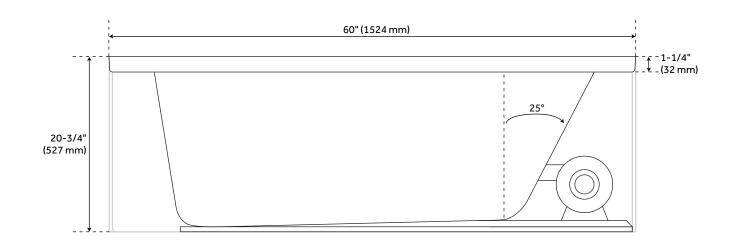

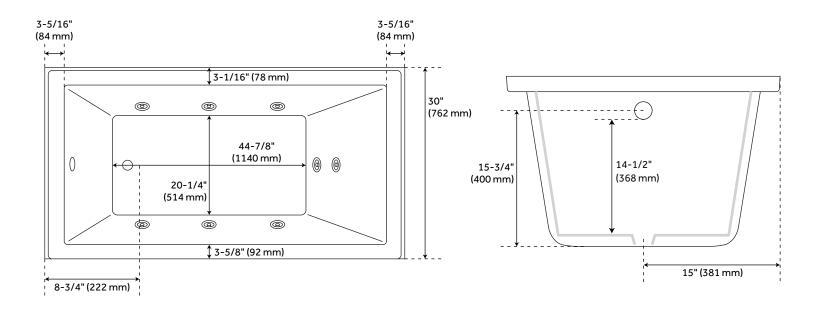

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.



See Website For Warranty Information signaturehardware.com/warranty

# 60" X 30" SITKA ACRYLIC ALCOVE WHIRLPOOL TUB

### SKU: 948062-WP SHSKSW6030LWH, SHSKSW6030RWH

#### COMPONENTS LIST

• Powerful whirlpool pump with variable flow device

#### INSTALLATION


- Whirlpool unit requires dedicated
- 20 Amp, 120V service
- You must provide a receptacle with a 20 Amp

#### configuration

• Electrical outlet must be mounted 4" (101 mm) above the floor line and 12" max (305 mm) inside from the edge of the bathtub, or in accordance with local building and electrical codes

#### INTEGRATED CONTROL PANEL

Intuitive electronic control buttons




#### **INSIDE OF BATH**

• (8) HIGH-FLOW DIRECTIONAL AND VOLUME-ADJUSTABLE WHIRLPOOL JETS




WHIRLPOOL JET

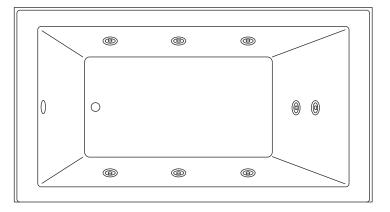

#### **ELECTRICAL CONFIGURATIONS**

#### WHIRLPOOL CIRCUIT WITH OPTIONAL HEATER

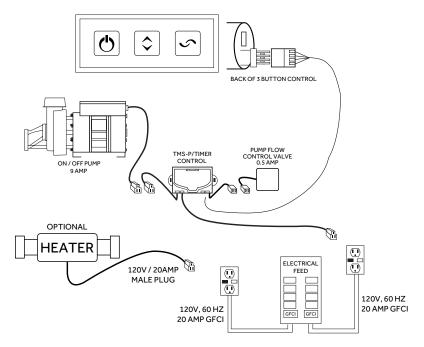

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.



See Website For Warranty Information signaturehardware.com/warranty