

# 60" X 32" BRADENTON ACRYLIC ALCOVE WHIRLPOOL TUB - WHITE

SKU: 948254-WP

Code: SHBDW6032



## FEATURES

Design: Modern  
Product Finish: White  
Material: acrylic  
Length: 60"  
Width: 32"  
Height: 21-1/2"  
Overflow Hole: Yes  
Water Depth To Overflow: 15"  
Interior Treatment: Smooth  
Faucet Included: No  
Shape: Rectangle  
Tub Overflow: Yes  
Tub Material: Acrylic  
Tub Interior Length: 40-1/2"  
Tub Interior Width: 20"  
Tap Deck: No  
Faucet Drillings: No Drillings  
Tub Weight Uncrated (lbs): 107  
Tub Weight Crated (lbs): 217  
Blower: Yes  
Blower Wattage: 600  
Number of Jets: 73  
Jet Color: White  
On/Off Switch: Yes

REVISED 6/5/2023

# 60" X 32" BRADENTON ACRYLIC ALCOVE WHIRLPOOL TUB - WHITE

SKU: 948254-WP

Code: SHBDW6032




## ADDITIONAL FEATURES

- All dimensions ( $\pm 1/2"$ ).
- Integral arm rests.
- Textured slip-resistant bottom.
- Pre-leveled base.
- 48-gallon capacity
- One single-speed air switch for whirlpool.
- 8 Strategically placed air jets move water with increased pressure for an invigorating bathing experience.
- Whirlpool system uses a powerful 1.75hp, 10.9 amp whirlpool pump.
- Integral tile flange and skirt with removable access panel.
- Safety Suction: Meets all requirements of durability and clog-resistance through standard testing.
- Pre-wired for simple plug-in installation.
- Optional Quick Connect Drop-In Drain Kit Includes:
  - Floor Plate, 1-1/2" PVC Pipe, 2" x 1-1/2" Trap Adapters, 1 Brass Threaded, 1 Brass Unthreaded Tailpiece and Plug.
  - Installs above your subfloor, but underneath your cement floor or tile, so you do not need access below the fixture.
- [ABS drain version available if needed for your installation.](#)

REVISED 6/5/2023

# 60" X 32" BRADENTON ACRYLIC ALCOVE WHIRLPOOL TUB

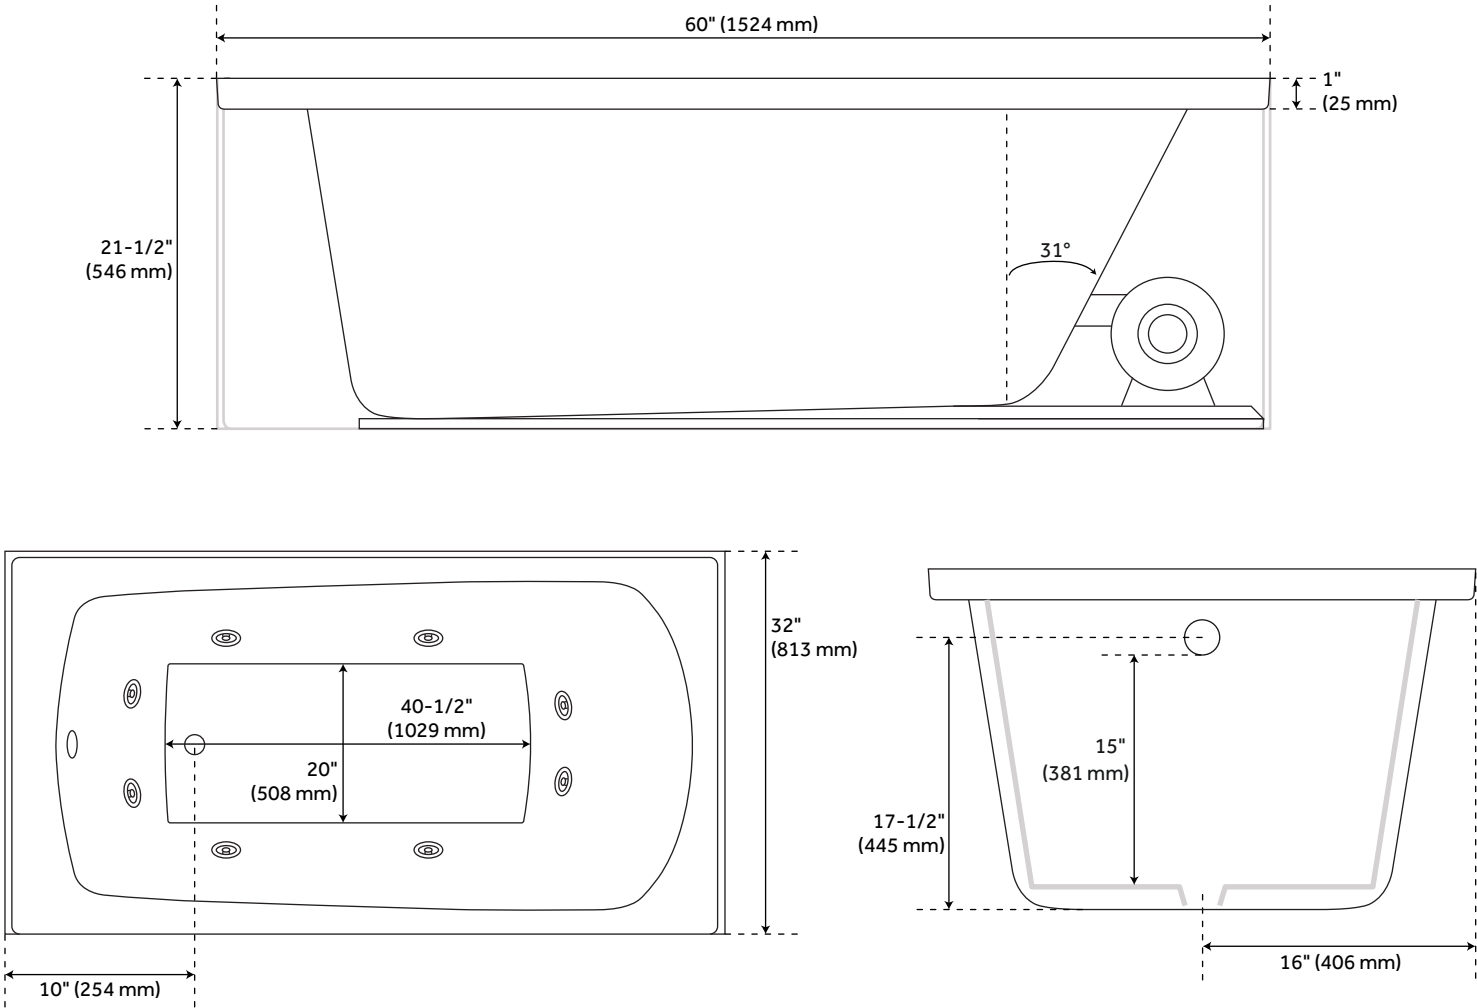

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

# 60" X 32" BRADENTON ACRYLIC ALCOVE WHIRLPOOL TUB

SKU: 948254-WP  
SHBDW6032LWH, SHBDW6032RWH

### COMPONENTS LIST

- Powerful whirlpool pump with variable flow device

### INSTALLATION

- Whirlpool unit requires dedicated 20 Amp, 120V service
- You must provide a receptacle with a 20 Amp configuration
- Electrical outlet must be mounted 4" (101mm) above the floor line and 12" max (305mm) inside from the edge of the bathtub, or in accordance with local building and electrical codes

### INTEGRATED CONTROL PANEL


- Whirlpool Baths: Equipped with on/off switch actuator. Each depression of the switch will activate the pump

### INSIDE OF BATH

- (8) HIGH-FLOW DIRECTIONAL AND VOLUME-ADJUSTABLE WHIRLPOOL JETS




WHIRLPOOL JET

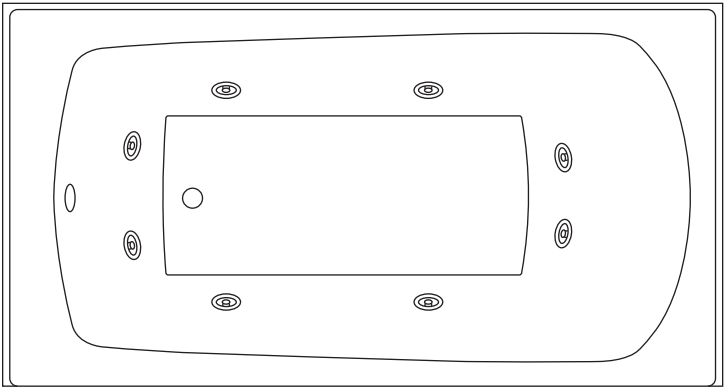

### ELECTRICAL CONFIGURATIONS

#### WHIRLPOOL WITH INSTALLED AIR SWITCH

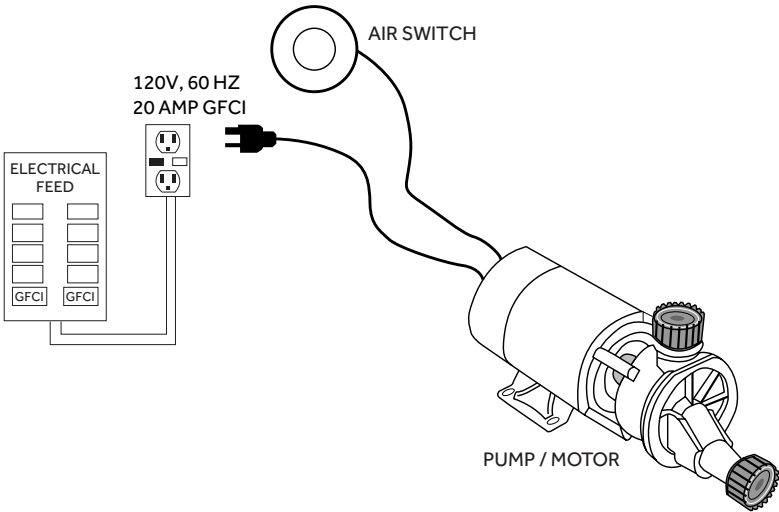

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.