


# 72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB - WHITE

SKU: 948270-WP  
Code: SHSKW7236

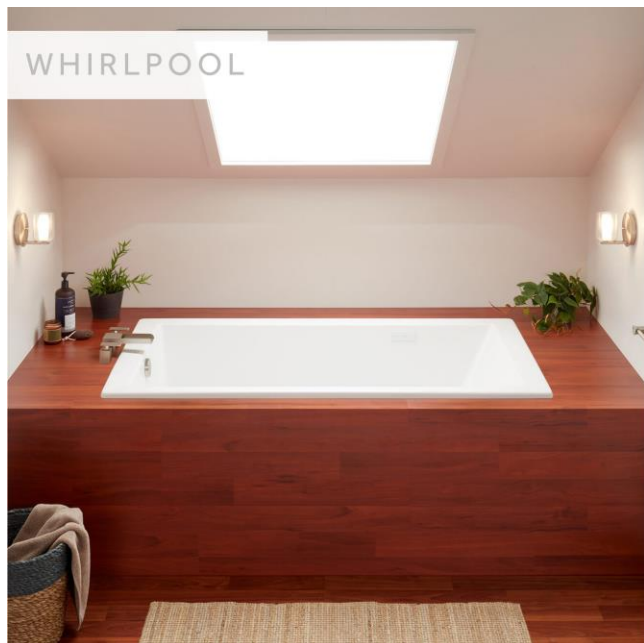


## FEATURES

Design: Modern  
Product Finish: White  
Material: acrylic  
Length: 72"  
Width: 36"  
Height: 23"  
Overflow Hole: Yes  
Water Depth To Overflow: 18"  
Interior Treatment: Smooth  
Faucet Included: No  
Shape: Rectangle  
Tub Overflow: Yes  
Tub Material: Acrylic  
Tub Interior Length: 53-3/4"  
Tub Interior Width: 26-3/4"  
Tap Deck: No  
Faucet Drillings: No Drillings  
Tub Weight Uncrated (lbs): 136  
Tub Weight Crated (lbs): 246  
Blower: Yes  
Jet Color: White  
On/Off Switch: Yes

REVISED 6/5/2023

# 72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB - WHITE

SKU: 948270-WP  
Code: SHSKW7236




## ADDITIONAL FEATURES

- All dimensions ( $\pm 1/2"$ ).
- Can be installed for undermount applications.
- 83-gallon (314.2-Liters) operating capacity.
- Textured slip-resistant bottom.
- Pre-leveled base.
- A dual-mount design, this can be installed as a drop-in or undermount tub.
- Intuitive electronic control pad.
- Whirlpool - 8 Strategically placed air jets move water with increased pressure for an invigorating bathing experience.
- Whirlpool system uses a powerful 1.75hp, 10.9 amp whirlpool pump.
- Safety Suction: Meets all requirements of durability and clog-resistance through standard testing.
- Optional Quick Connect Drop-In Drain Kit Includes:
  - Floor Plate, 1-1/2" PVC Pipe, 2" x 1-1/2" Trap Adapters, 1 Brass Threaded, 1 Brass Unthreaded Tailpiece and Plug.
  - Installs above your subfloor, but underneath your cement floor or tile, so you do not need access below the fixture.
- [ABS drain version available if needed for your installation.](#)

REVISED 6/5/2023

# 72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB

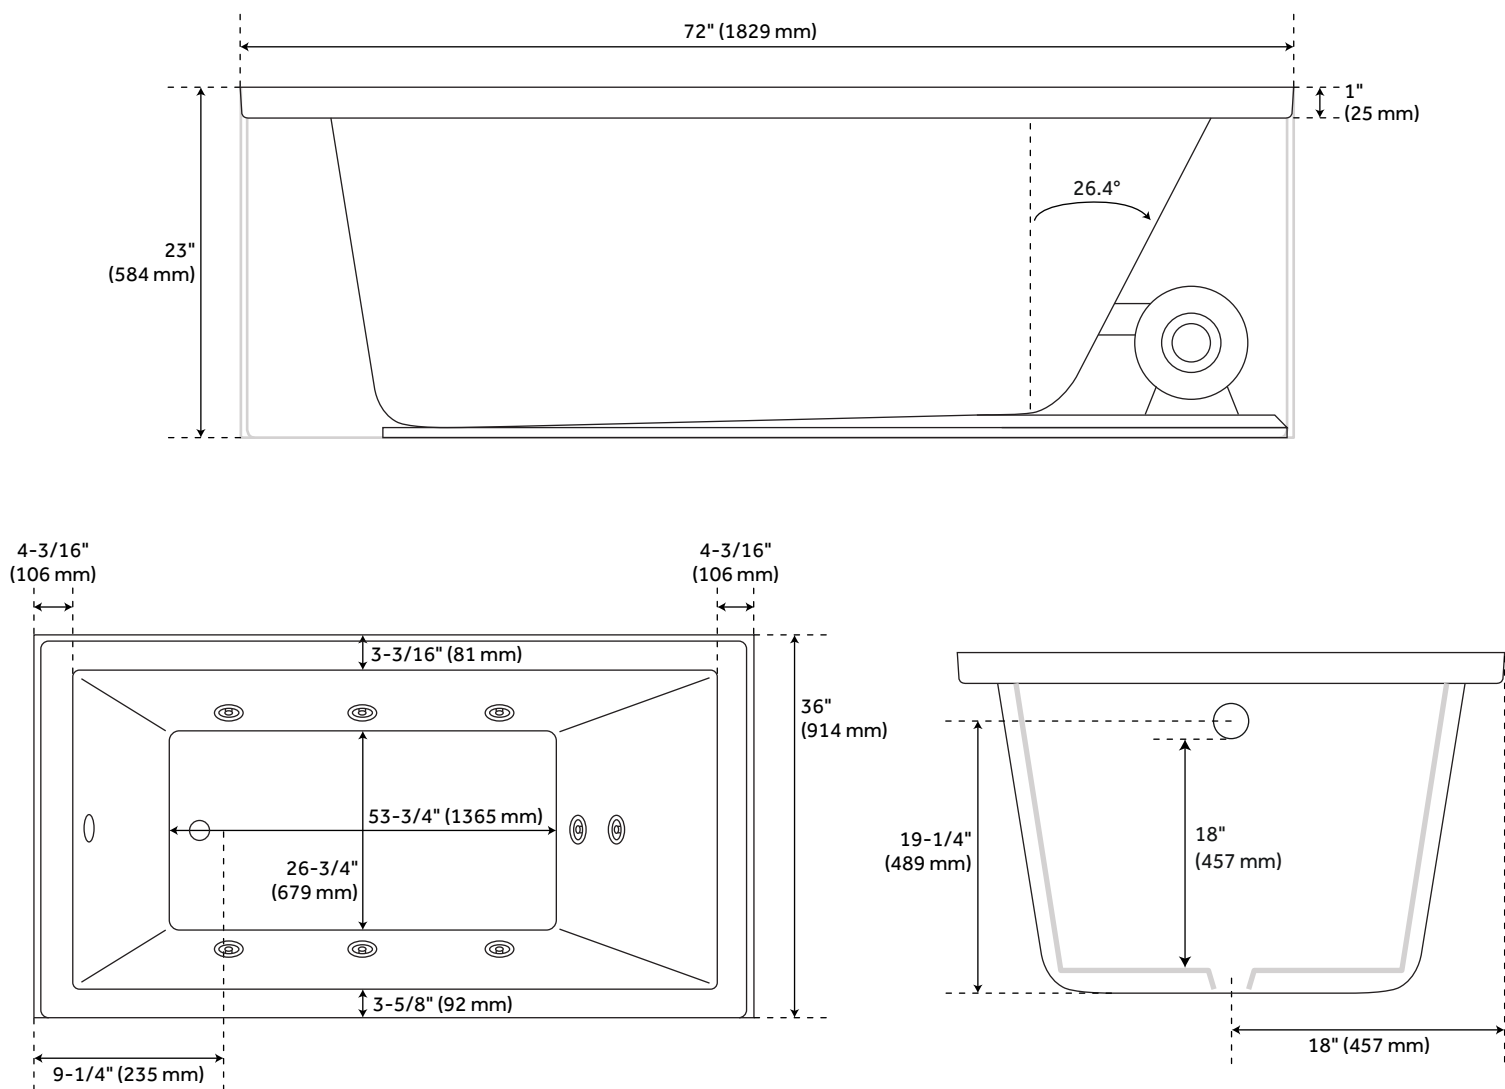

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

# 72" X 36" SITKA ACRYLIC DROP-IN WHIRLPOOL TUB

SKU: 948270-WP  
SHSKW7236WH

### COMPONENTS LIST

- Powerful whirlpool pump with variable flow device

### INSTALLATION

- Whirlpool unit requires dedicated 20 Amp, 120V service
- You must provide a receptacle with a 20 Amp configuration
- Electrical outlet must be mounted 4" (101mm) above the floor line and 12" max (305mm) inside from the edge of the bathtub, or in accordance with local building and electrical codes

### INTEGRATED CONTROL PANEL


- Whirlpool Baths: Equipped with on/off switch actuator. Each depression of the switch will activate the pump

### INSIDE OF BATH

- (8) HIGH-FLOW DIRECTIONAL AND VOLUME-ADJUSTABLE WHIRLPOOL JETS




WHIRLPOOL JET

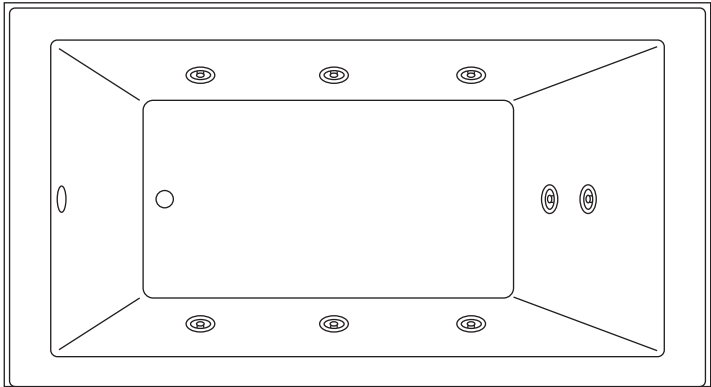

### ELECTRICAL CONFIGURATIONS

#### WHIRLPOOL CIRCUIT WITH OPTIONAL HEATER

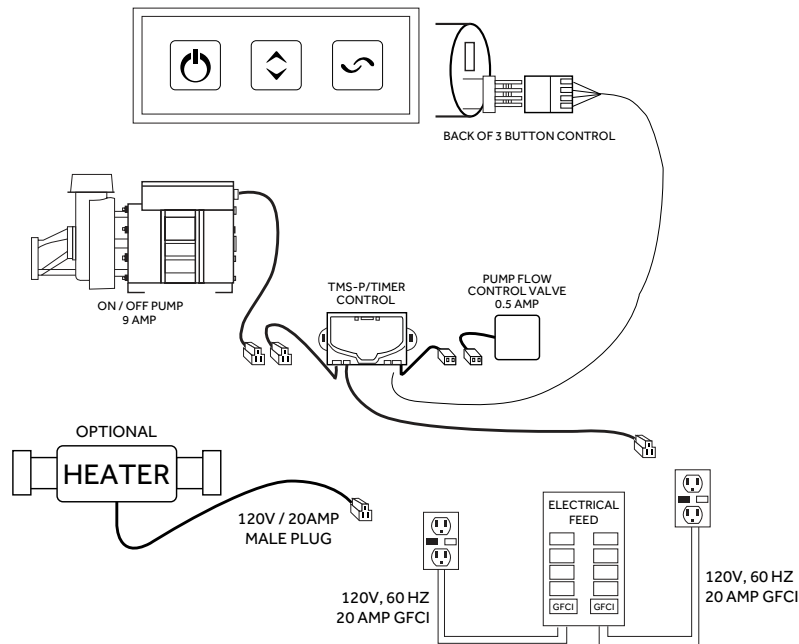

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.