SKU: 948272-WP Code: SHSKW6032



FEATURES

Design: Modern Product Finish: White Material: acrylic Length: 60" Width: 32" Height: 20-3/4" Overflow Hole: Yes

Water Depth To Overflow: 14-1/2" Interior Treatment: Smooth

Faucet Included: No Shape: Rectangle

Tub Overflow: Yes Tub Material: Acrylic

Tub Interior Length: 44-7/8" Tub Interior Width: 22-1/4"

Tap Deck: No

Faucet Drillings: No Drillings Tub Weight Uncrated (lbs): 105 Tub Weight Crated (lbs): 215

Blower: Yes


Blower Wattage: 600 Number of Jets: 64 On/Off Switch: Yes


SKU: 948272-WP Code: SHSKW6032



ADDITIONAL FEATURES

- All dimensions (± 1/2").
- Textured slip-resistant bottom.
- Pre-leveled base.
- 53-gallon (200.6-Liters) operating capacity.
- Intuitive electronic control pad.
- 8 Strategically placed air jets move water with increased pressure for an invigorating bathing experience.
- Whirlpool system uses a powerful 1.75hp, 10.9 amp whirlpool pump.
- Safety Suction: Meets all requirements of durability and clog-resistance through standard testing.
- Optional Quick Connect Drop-In Drain Kit Includes:
 - Floor Plate, 1-1/2" PVC Pipe, 2" x 1-1/2" Trap Adapters, 1 Brass Threaded, 1 Brass Unthreaded Tailpiece and Plug.
 - Installs above your subfloor, but underneath your cement floor or tile, so you do not need access below the fixture.
- ABS drain version available if needed for your installation.

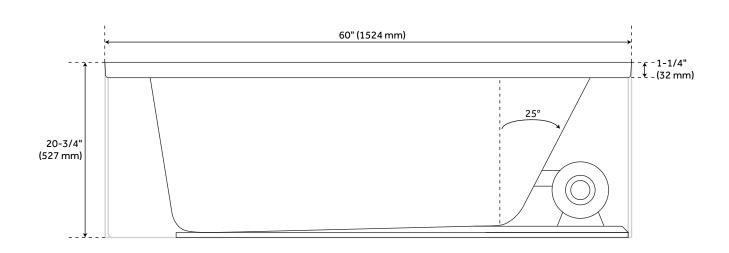

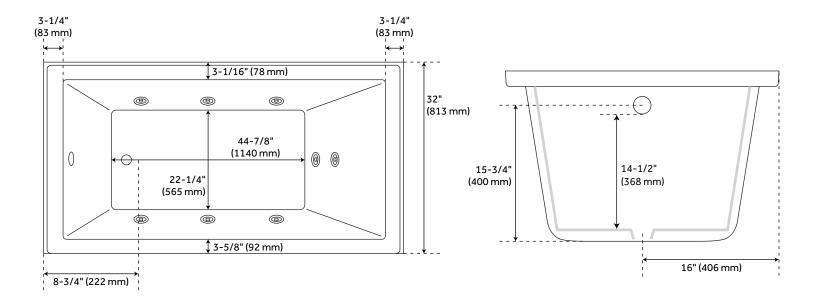

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

SKU: 948272-WP

SHSKSW6032LWH, SHSKSW6032RWH

COMPONENTS LIST

• Powerful whirlpool pump with variable flow device

INSTALLATION

- Whirlpool unit requires dedicated 20 Amp, 120V service
- You must provide a receptacle with a 20 Amp configuration
- \bullet Electrical outlet must be mounted 4" (101mm) above the floor line and 12" max (305mm) inside from the edge of the bathtub, or in accordance with local building and electrical codes

INTEGRATED CONTROL PANEL


• Whirlpool Baths: Equipped with on/off switch actuator. Each depression of the switch will activate the pump

INSIDE OF BATH

• (8) HIGH-FLOW DIRECTIONAL AND VOLUME-ADJUSTABLE WHIRLPOOL JETS




WHIRLPOOL JET

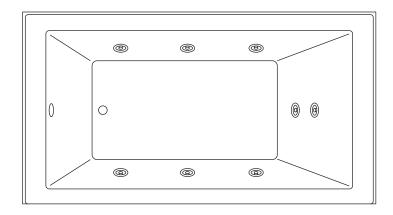

ELECTRICAL CONFIGURATIONS

WHIRLPOOL CIRCUIT WITH OPTIONAL HEATER

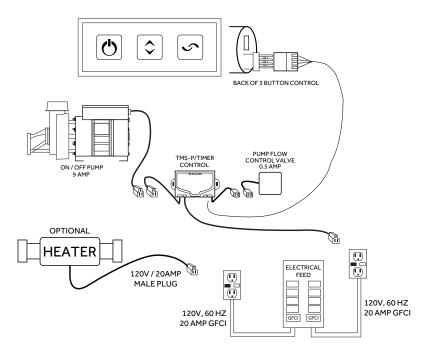

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

