

HIBISCUS THERMOSTATIC SHOWER VALVE

SKU: 948558

Code: SHHB9009, SHHB9009, SH6004, SHHB9009, SH6006



FEATURES

Installation Type: Wall Mount

Features: Thermostatic

Design: Modern

Material: Brass

Mounting Hardware Included: Yes

Assembly Required: No

Handle Type: Lever

Installation Type: Wall Mount

Valve Trim Width: 6-5/8"

Valve Trim Height: 6-5/8"

REVISED 3/17/2023

HIBISCUS THERMOSTATIC SHOWER VALVE

SKU: 948558

Code: SHHB9009, SHHB9009, SH6004, SHHB9009, SH6006




ADDITIONAL FEATURES

- Metal handle.
- Temperature outlet factory preset to 104 degrees Fahrenheit.
- Temperature can be easily adjusted up and down to user's comfort level.
- Scald guard protection.
- High temperature limit stop.
- Thermostatic technology keeps shower temperature within 1 degree Celsius.
- For proper installation, requires use of volume control valve and trim.
- Wall thickness range: 1" to 1-3/4"
- Optional Rough-in Valve:
 - Bronze valve body.
 - Ceramic cartridge.
 - Integral water stops and check valve.
 - Recommended valve installation depth 1-5/8" to 2-3/8"
 - Must be installed in accordance with provided installation instructions.

REVISED 3/17/2023

HIBISCUS THERMOSTATIC SHOWER VALVE

SKU: 948558
SHHB9009, SHHB9009Z

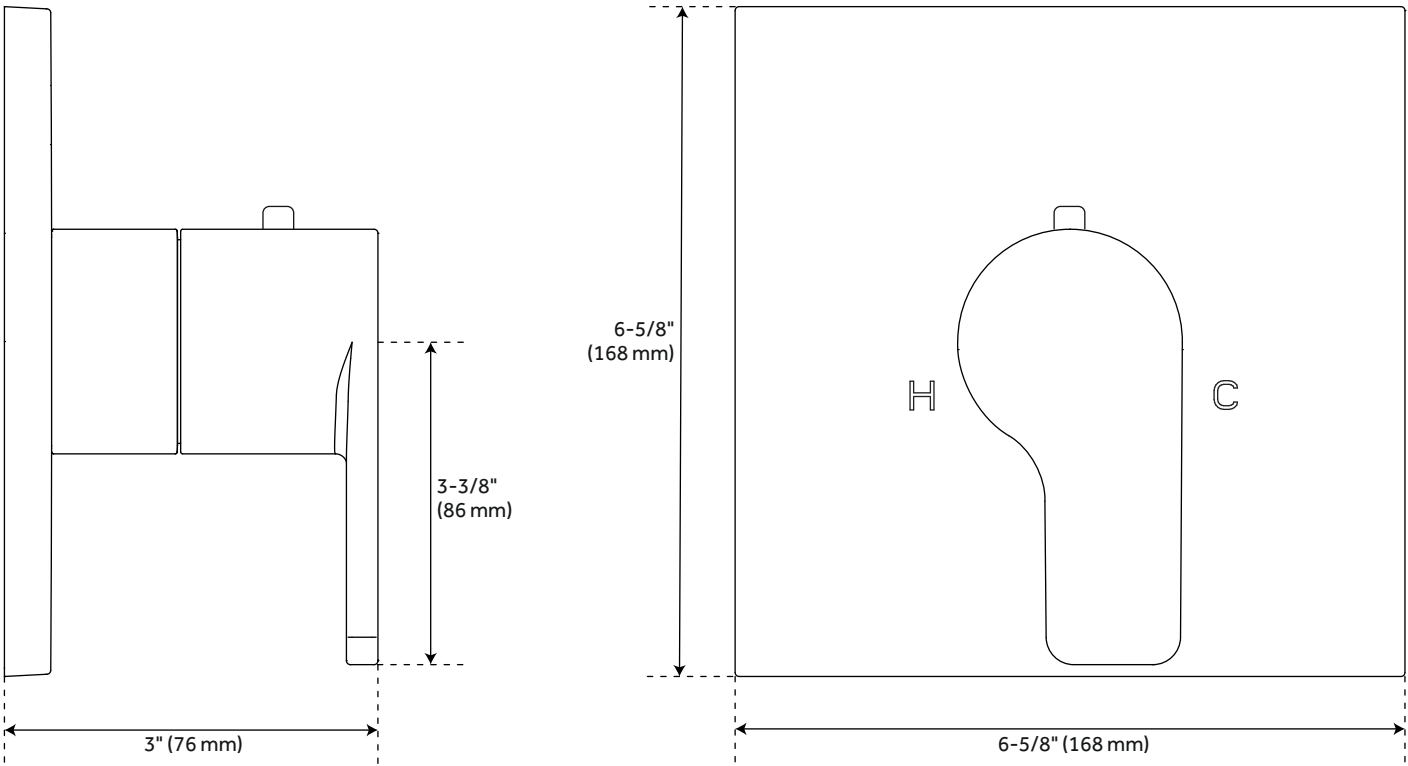

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

