

# GREYFIELD SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948973

Code: SHGF8040, SH5001SSG



## FEATURES

Material: Brass

Flow Rate: Rough-in Valve Capacity: 7.4 gpm (28 L/min) @ 80 psi

Connection Type: 1/2" MIP and SWT

Diverter Outlets: 2

Cartridge Type: Ceramic Disc

ASME A112.18.1/CSA B125.1, ASSE 1016 Type P, Massachusetts Accepted, LISTED ID: SHGF8040\*, SH5001SSG



## ADDITIONAL FEATURES


- Dual functionality allows for one or both shower features to run at a time.
- Optional Rough-in Valve:
  - Pressure balanced with integral stops.
  - One-piece cartridge design for ease of maintenance.
  - Back-to-back capability.
  - Adjustable temperature limit stop.
  - Cast bronze body.
  - Quick remove plaster guard.
  - Easy mounting brackets.
  - Valve Dimensions: 4-7/8" L x 4-3/8" W x 5-1/2" D .

REVISED 9/10/2025

# GREYFIELD SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948973

Code: SHGF8040, SH5001SSG

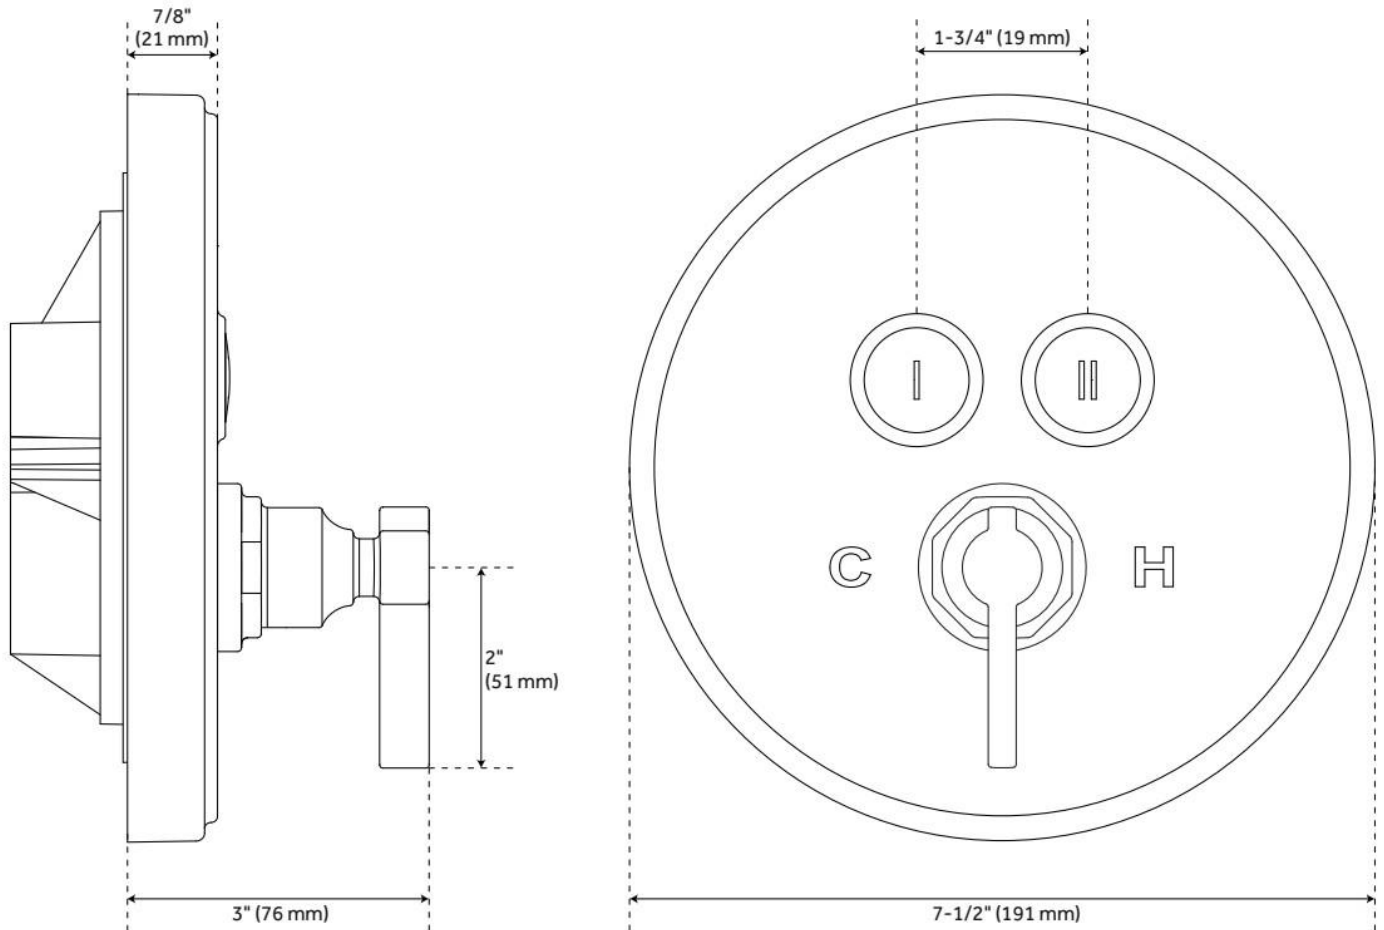

REVISED 9/10/2025

# PRESSURE BALANCE ROUGH-IN VALVE FOR SIMPLE SELECT TRIMS

SKU: 460073

Code: SH5001SSG



## FEATURES

Material: Bronze

Flow Rate: Rough-in Valve Capacity: 7.4 gpm (28 L/min) @ 80 psi

Connection Type: 1/2" MIP and SWT

Diverter Outlets: 2

Cartridge Type: Ceramic Disc

ASME A112.18.1/CSA B125.1, ASSE 1016 Type P, Massachusetts Accepted, LISTED ID: SH5001SSG



## ADDITIONAL FEATURES

- Dual functionality allows for one or both shower features to run at a time.
- Pressure balanced with integral stops.
- One-piece cartridge design for ease of maintenance.
- Back-to-back capability.
- Adjustable temperature limit stop.
- Cast bronze body.
- Quick remove plaster guard.
- Easy mounting brackets.
- Compatible with Greyfield and Hibiscus Simple Select trims.

REVISED 9/10/2025