

# GREYFIELD SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948973

Code: SHGF8040, SH5001SSG, SHGF8040, SHGF8040, SH5001SSG, SH484196, SH484197



## FEATURES

Installation Type: Wall Mount  
Features: Pressure-Balanced  
Design: Modern  
Material: Brass  
Assembly Required: No  
Shape: Round  
Handle Type: Lever  
Installation Type: Wall Mount  
NPT Connection: 1/2"  
Valve Trim Width: 7-1/2"  
Valve Trim Height: 7-1/2"  
Valve Trim Diameter: 7-1/2"  
Diverter Included: Yes  
Diverter Outlets: 2

ASME A112.18.1/CSA B125.1

REVISED 3/17/2023

# GREYFIELD SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948973

Code: SHGF8040, SH5001SSG, SHGF8040, SHGF8040, SH5001SSG, SH484196, SH484197




## ADDITIONAL FEATURES

- Dual functionality allows for one or both shower features to run at a time.
- Optional Rough-in Valve:
  - Pressure balanced with integral stops.
  - One-piece cartridge design for ease of maintenance.
  - Back-to-back capability.
  - Adjustable temperature limit stop.
  - Cast bronze body.
  - Quick remove plaster guard.
  - Easy mounting brackets.
  - Valve Dimensions: 4-7/8" L x 4-3/8" W x 5-1/2" D .

REVISED 3/17/2023

# GREYFIELD SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE




SKU: 948973  
SHGF8040, SHGF8040Z

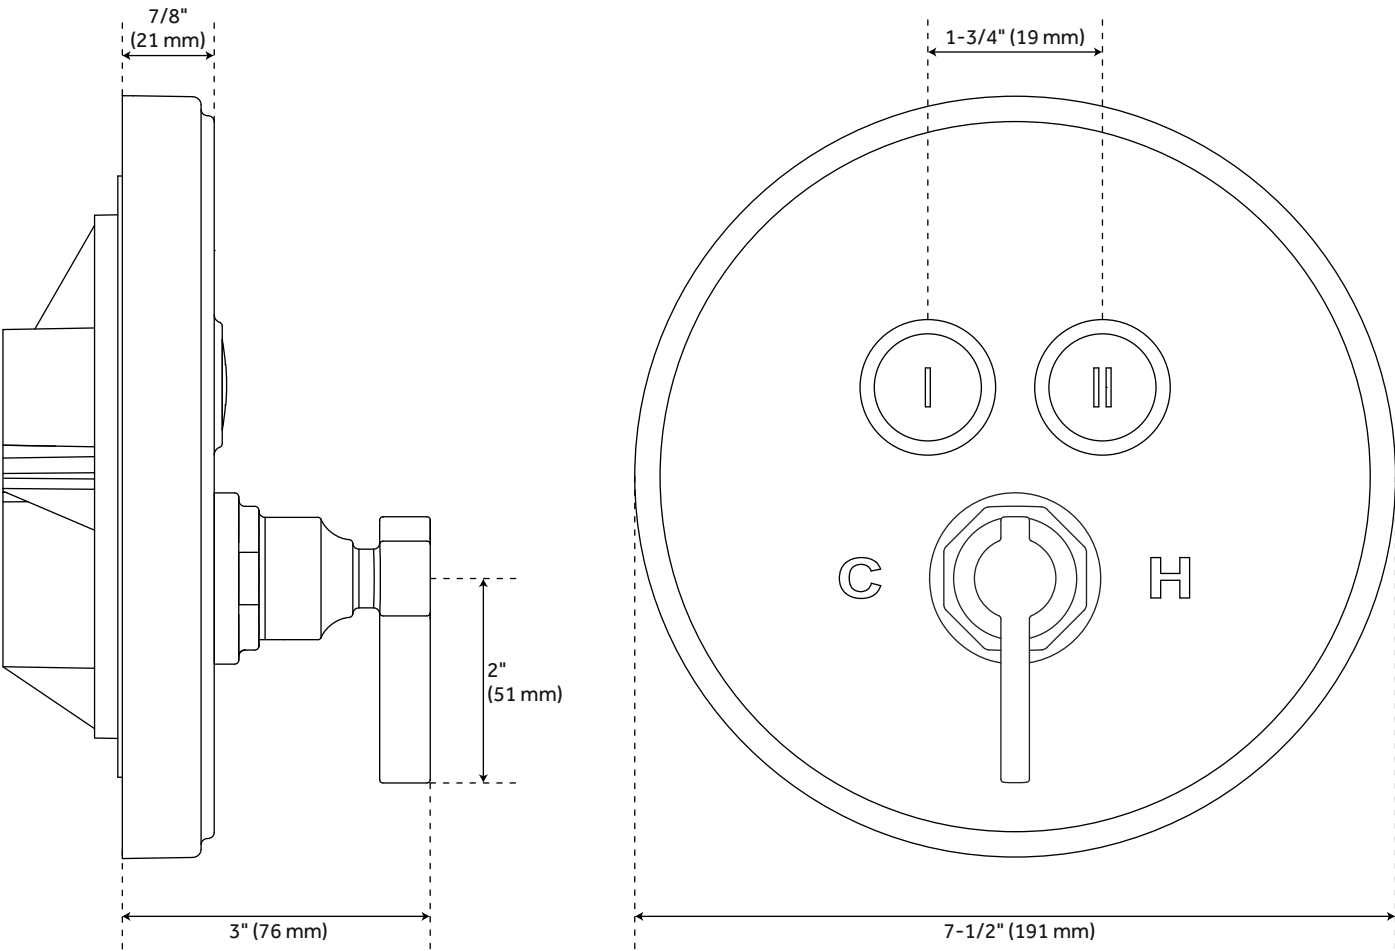

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

# GREYFIELD OPTIONAL PRESSURE BALANCE ROUGH-IN VALVE

SKU: 948973  
SH5001SSG

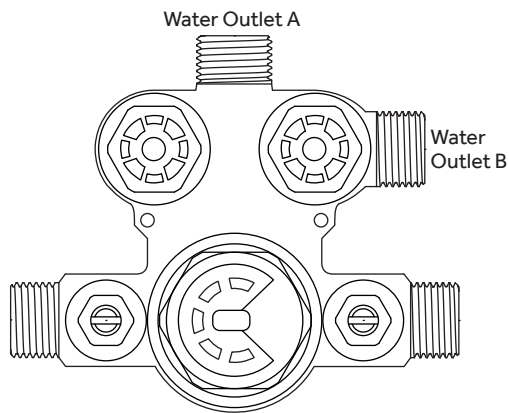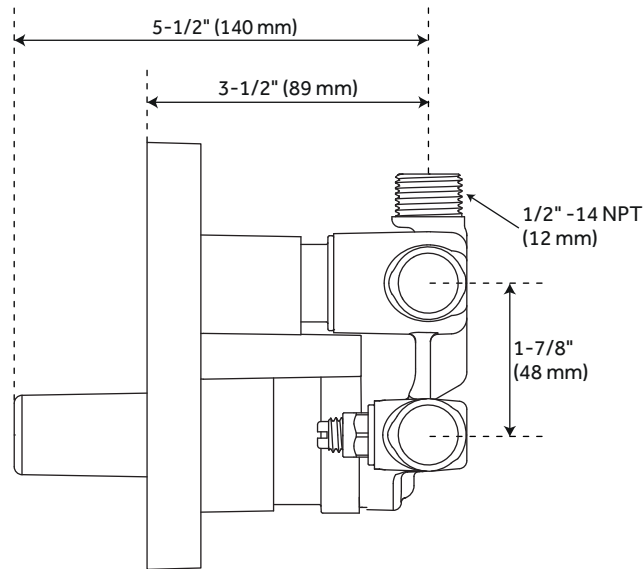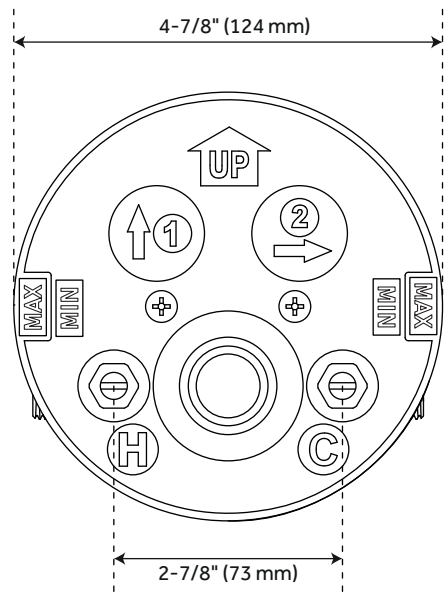

STANDARD:

Pressure (psi)		20	40	60	80
Simultaneous (Both Valves Open)	Total (gpm)	3.4	5	6.3	7.4
	Outlet A (gpm)	1.2	2.2	2.9	3.5
	Outlet B (gpm)	2.2	2.8	3.4	3.9
Separate (A or B Closed)	Outlet A (gpm)	2.5	3.9	4.8	5.5
	Outlet B (gpm)	2.5	3.9	4.8	5.5

WITH FLOW RESTRICTOR:

Pressure (psi)		20	40	60	80
Simultaneous (Both Valves Open)	Total (gpm)	1.20	1.40	1.53	1.64
	Outlet A (gpm)	0.43	0.56	0.64	0.68
	Outlet B (gpm)	0.77	0.84	0.89	0.96
Separate (A or B Closed)	Outlet A (gpm)	1.17	1.38	1.49	1.59
	Outlet B (gpm)	1.16	1.39	1.49	1.60

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.