

GUNTHER FREESTANDING TUB FAUCET WITH HAND SHOWER

SKU: 953080

Code: SHGUFS2000G, SHFSR2000WS, SHFSR2000



FEATURES

Material: Metal construction for strength and durability

Installation Type: Freestanding

Flow Rate: 12.0 gpm (45.42 L/min) @ 80 psi

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Spray Type: Full

Cartridge Type: Ceramic Disc

Swivel Spout: No

Required for Installation: Rough-in valve: SHFSR2000 or SHFSR2000WS

ASME A112.18.1/CSA B125.1, CEC Listed, Massachusetts Accepted, LISTED ID: SHGUFS2000GXX, SHFSR2000, SHFSR2000WS



ADDITIONAL FEATURES


- Single function hand shower.
- Integral diverter to hand shower.
- Handshower includes factory installed backflow prevention check valve.
- Installation on an existing concrete slab will require cutting and concrete removal.

REVISED 5/15/2024

GUNTHER FREESTANDING TUB FAUCET WITH HAND SHOWER

SKU: 953080

Code: SHGUF2000G, SHFSR2000WS, SHFSR2000

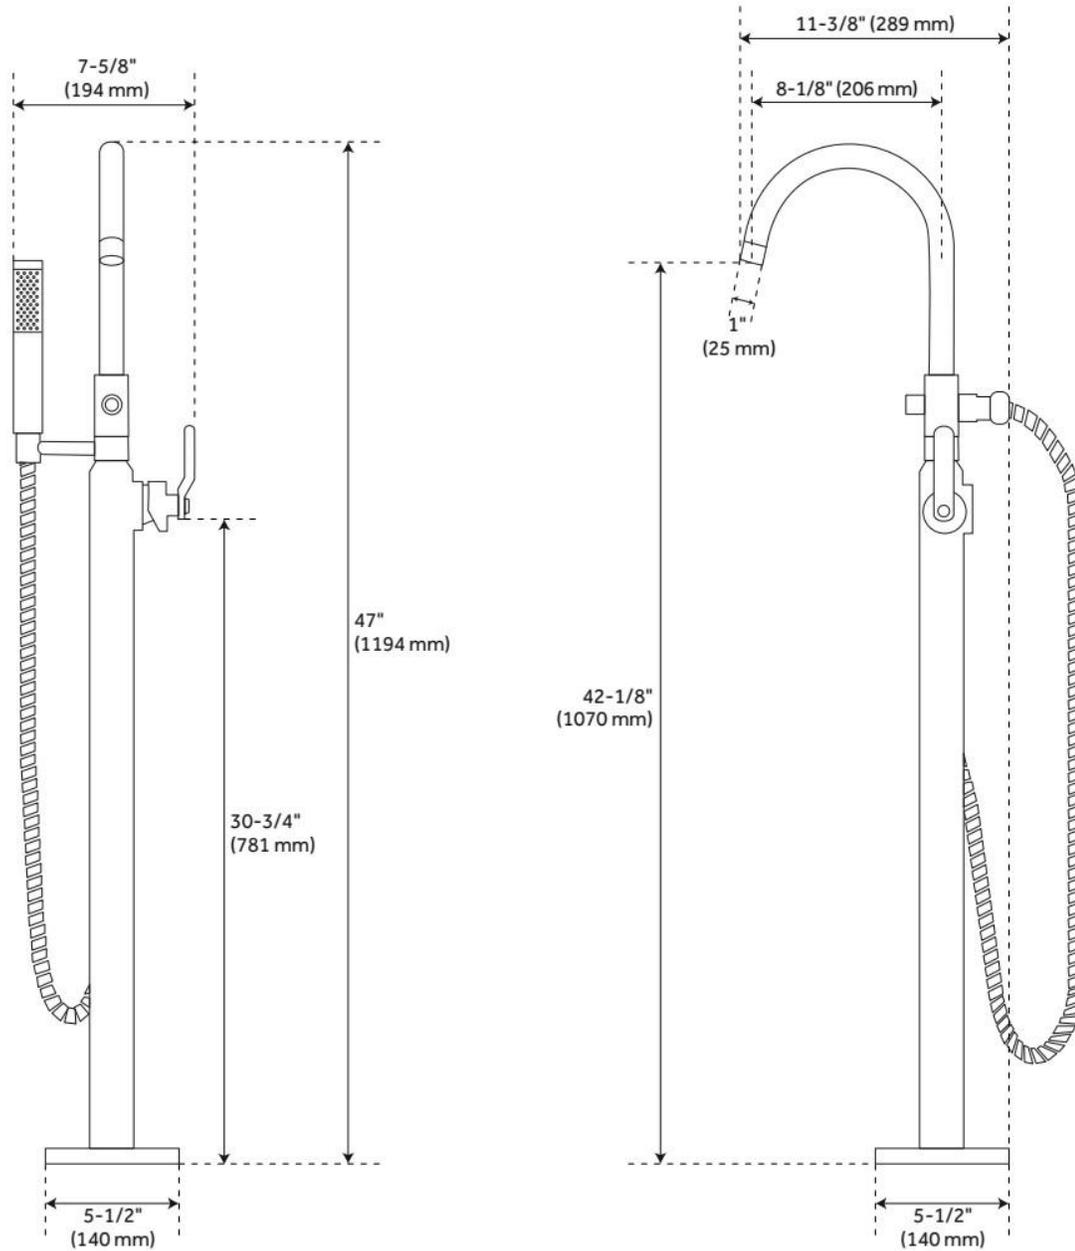

REVISED 5/15/2024

FREESTANDING TUB FAUCET ROUGH-IN VALVE

SKU: 446521
Code: SHFSR2000

FEATURES

Material: Metal construction for strength and durability



ASME A112.18.1/CSA B125.1, Massachusetts Accepted, LISTED ID: SHFSR2000





ADDITIONAL FEATURES

- Not compatible with Ryle, Napier, Keswick, Copper and Cybelle Freestanding Tub Faucets.

REVISED 5/13/2024

FREESTANDING TUB FAUCET ROUGH-IN VALVE

SKU: 446521
Code: SHFSR2000

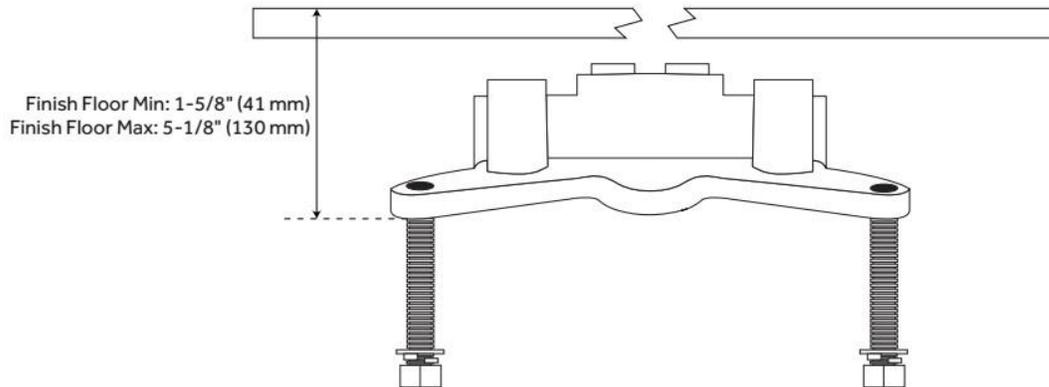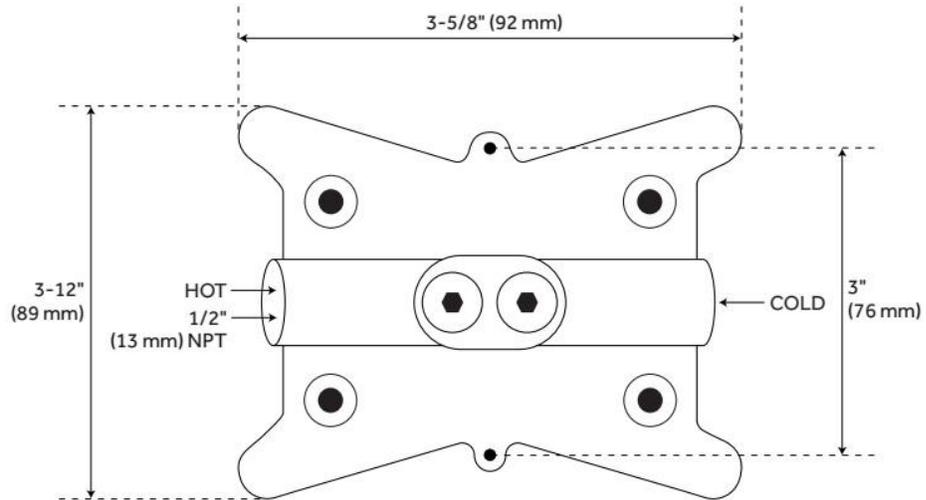

REVISED 5/13/2024

FREESTANDING TUB FAUCET ROUGH-IN VALVE WITH STOPS

SKU: 448006
Code: SHFSR2000WS

FEATURES

Material: Metal construction for strength and durability



ASME A112.18.1/CSA B125.1, Massachusetts Accepted, LISTED ID: SHFSR2000WS




ADDITIONAL FEATURES

- Not compatible with the Ryle, Napier, Keswick, Cooper, and Cybelle Freestanding Tub Faucets.

REVISED 5/13/2024

FREESTANDING TUB FAUCET ROUGH-IN VALVE WITH STOPS

SKU: 448006
Code: SHFSR2000WS

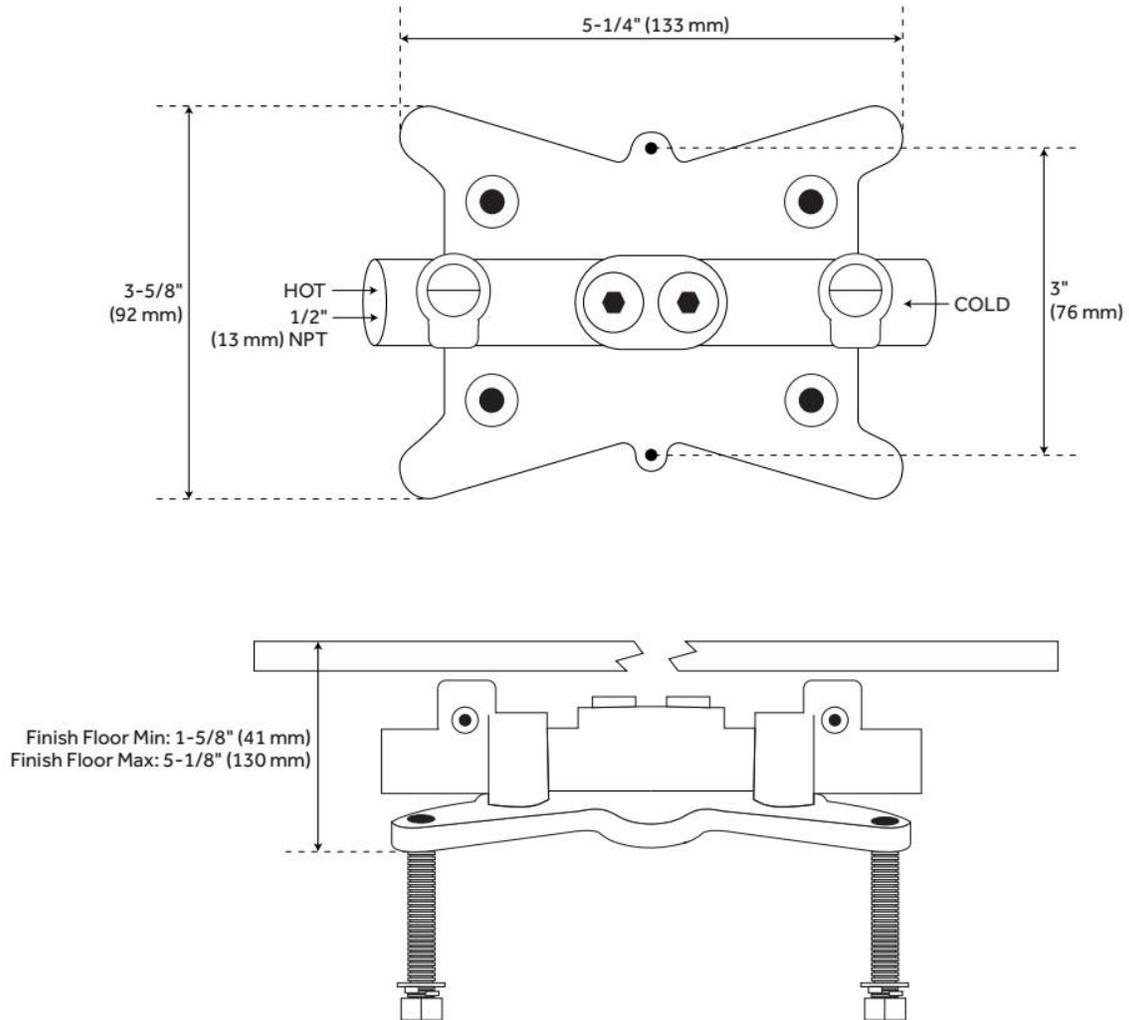

REVISED 5/13/2024