LEXIA THERMOSTATIC SHOWER SYSTEM WITH DUAL SHOWERHEADS AND HAND SHOWER

SKU: 953780

Code: SHLE9009, SH6006, SHRSA122, SHRSB820RG, SHHS4030G, SHH1010, SHWES2050, SHLE9005, SH6103, SHLE9007, SH6040, SH488919



ASME A112.18.1/CSA B125.1 WaterSense by IAPMO





FEATURES

Features: Rough-In Included; Hand Shower Included

Material: Metal

Assembly Required: Yes

Shape: Round Handle Type: Lever

Shower Head Installation Type: Wall

Number of Shower Heads: 2 Shower Head Diameter: 7-7/8" Shower Head Material: ABS Shower Head Spray: Rainfall Shower Arm Included: Yes Shower Arm Extension: 12-3/8" Shower Arm Height: 5-3/8" Shower Head IPS: 1/2" Shower Head Swivel: Yes Hand Shower Length: 8-7/8" Hand Shower Hose Length: 60"

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Diverter Included: Yes **Diverter Outlets: 3**

Hand Shower Material: ABS

Rainfall Shower Head Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

REVISED 1/23/2024

signature**hardware**.com

signaturehardware.com/warranty

LEXIA THERMOSTATIC SHOWER SYSTEM WITH DUAL SHOWERHEADS AND HAND SHOWER

SKU: 953780


Code: SHLE9009, SH6006, SHRSA122, SHRSB820RG, SHHS4030G, SHH1010, SHWES2050, SHLE9005, SH6103, SHLE9007, SH6040, SH488919




ADDITIONAL FEATURES


- Thermostatic technology keeps shower temperature within 1 degree Celsius.
- Temperature outlet factory calibrated to 104 degrees Fahrenheit and can be easily adjusted up or down to user's comfort level.
- Six total settings allow for shared water flow between outlets, giving you the ability to use two functions at once.
- Metal handles.
- Dual single function shower heads (full spray) with easy-clean silicone nozzles.
- Single function hand shower.
- 60" 72" stretchable metal shower hose.
- Adjustable angle for hand shower mount.
- Must be installed in accordance with provided installation instructions.
- Recommended valve installation depth 1-5/8" to 2-3/8".
- Included Rough-in valves:
- Thermostatic rough-in valve features scald guard protection, high temperature limit stop, integral water stops and check valve, a ceramic cartridge, and a bronze valve body.
- Volume control rough-in valve features a ceramic disc cartridge and brass valve body.
- Diverter valve features a ceramic disc cartridge and brass valve body. An available Single-Function Diverter valve Cartridge restricts water flow to one outlet at a time.

LEXIA THERMOSTATIC SHOWER VALVE TRIM

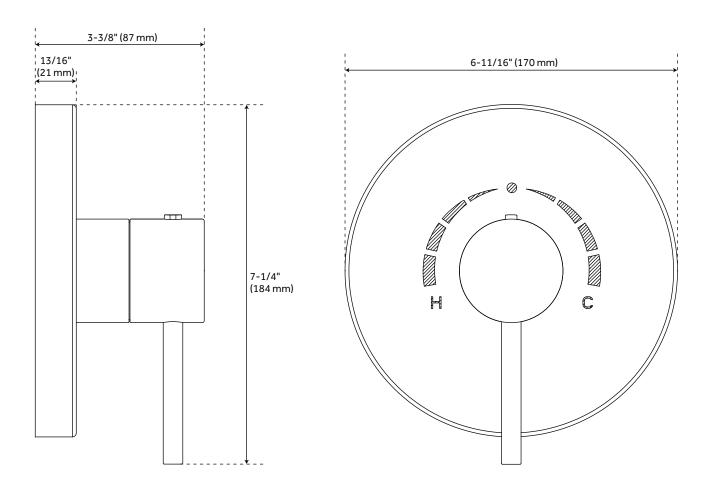


LEXIA THERMOSTATIC SHOWER ROUGH-IN VALVE

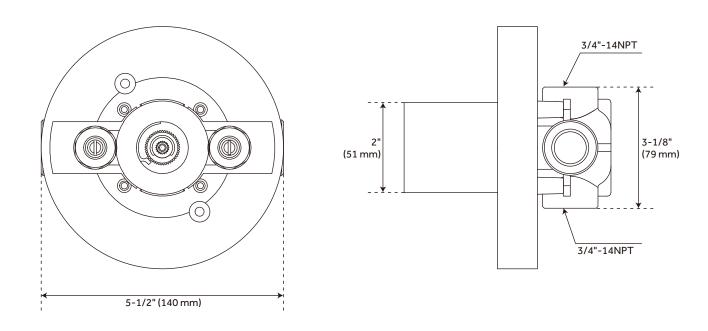


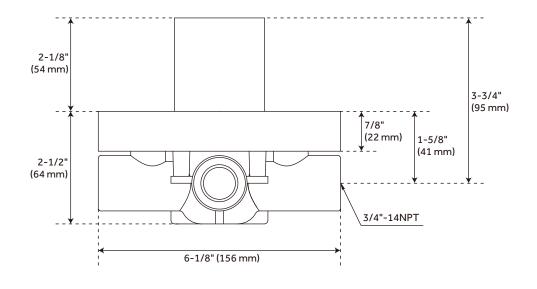

LEXIA 3-WAY IN-WALL SHOWER DIVERTER

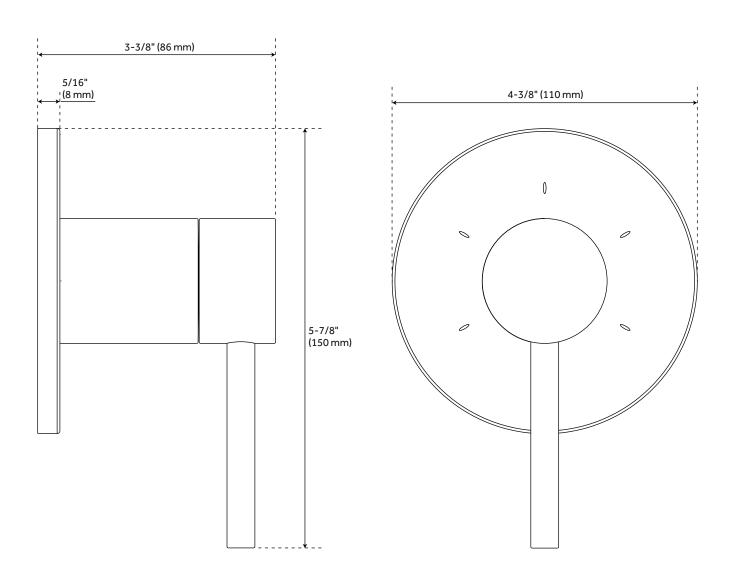


LEXIA DIVERTER ROUGH-IN VALVE

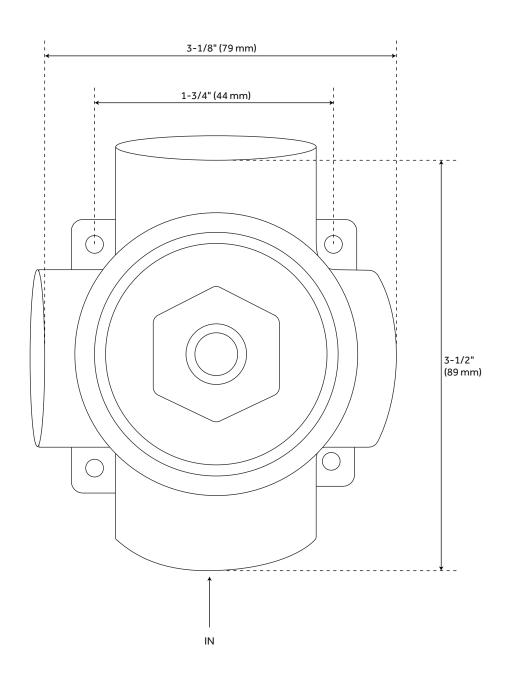





LEXIA IN-WALL SHOWER VOLUME CONTROL TRIM

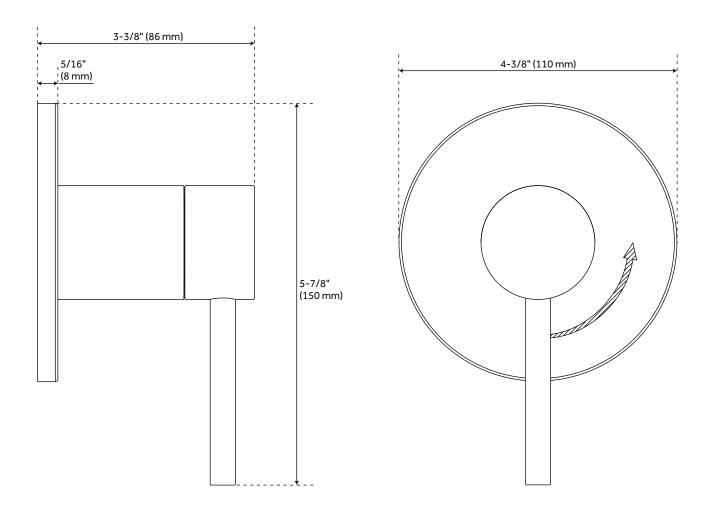



LEXIA VOLUME CONTROL ROUGH-IN VALVE

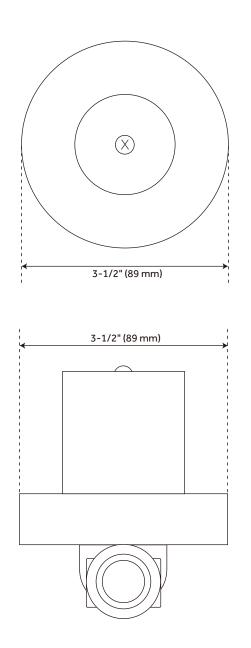

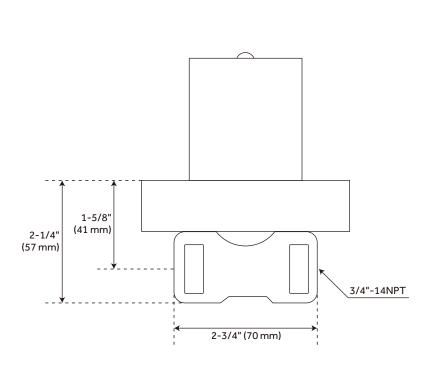


LEXIA WALL-MOUNT SHOWER HEAD

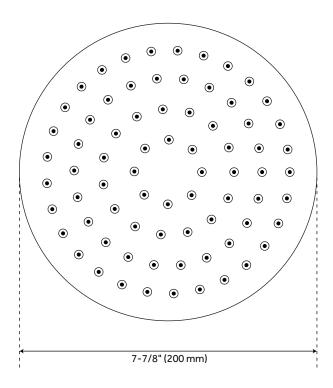

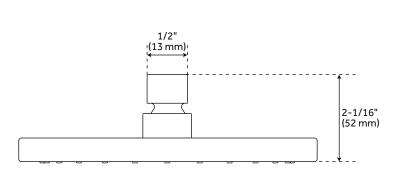


LEXIA WALL-MOUNT SHOWER ARM

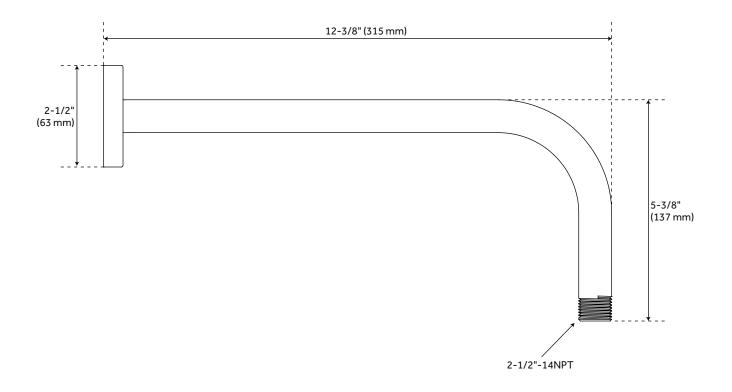


LEXIA HAND SHOWER




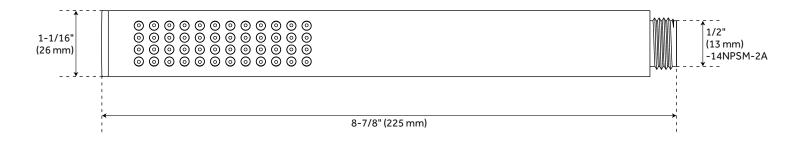


LEXIA SLIDE BAR

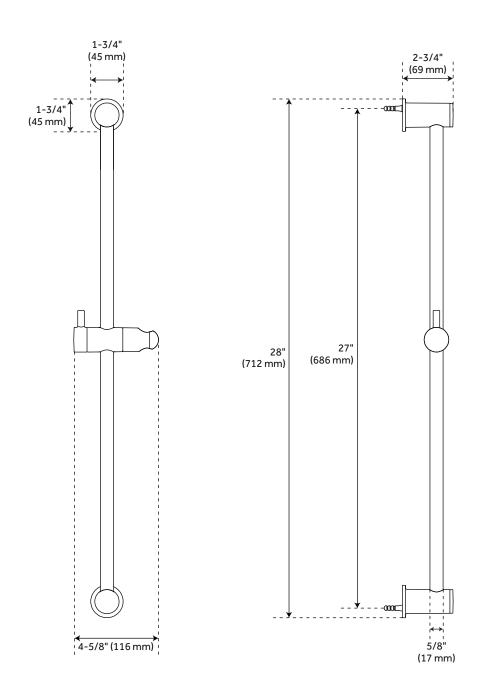



LEXIA HAND SHOWER HOSE

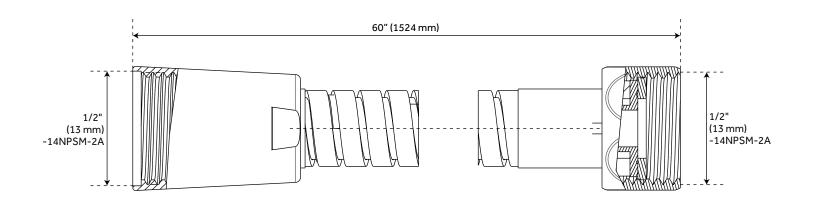



LEXIA ROUND WATER SUPPLY ELBOW

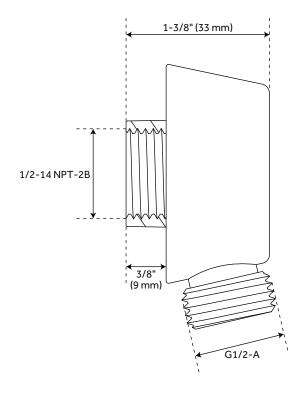

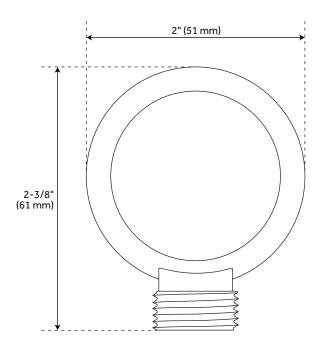

LEXIA BODY SPRAY

