

WAYCROSS TWO-PIECE EUROPEAN REAR OUTLET TOILET

SKU: 953821

Code: SH484141,SH484145



FEATURES

Installation Type: Floor Mount
Product Finish: White
Material: Vitreous china
Length: 15-1/4"
Height: 31-3/4"
Depth: 28-1/2"
Rough In: 7-1/2"
Bowl Shape: Elongated
Bowl Height: 16-1/2"
Gallons Per Flush: 1.28 (4.8 Lpf)

ASME A112.19.2/CSA B45.1

ICC/ANSI A117.1

CEC Listed



REVISED 1/4/2023

WAYCROSS TWO-PIECE EUROPEAN REAR OUTLET TOILET

SKU: 953821

Code: SH484141,SH484145




ADDITIONAL FEATURES

- **European rear outlet toilet. See Additional Images for detailed photos.**
- Includes P-trap connector.
- Connector may be glued to 3" PVC or ABS coupling or hub fitting. Also fastens to 4" PVC or ABS hub fitting with included rubber seal.
- Connector configuration allows for $\pm 1"$ adjustment of rough in height of the drain pipe at the wall.
- Optional bidet seat details:
- Features warm water, seat warmer, spray massage, warm drying, smart night light, and auto-cleaning modes.
- Includes a remote control for one-handed operation.
- Features Nozzle Clean mode for cleaning.
- The UV light treatment sterilizes the spray nozzle by killing bacteria in three minutes. The red indicator light automatically turns on 10 seconds after use, stays on for three minutes during the cleaning process, and turns off when it is complete.
- Soft-closing seat and lid.
- Installs easily with quick-release system.
- Designed for single- and two-piece toilets.
- Power cord length: 49"


REVISED 1/4/2023

WAYCROSS TWO-PIECE EUROPEAN REAR OUTLET TOILET

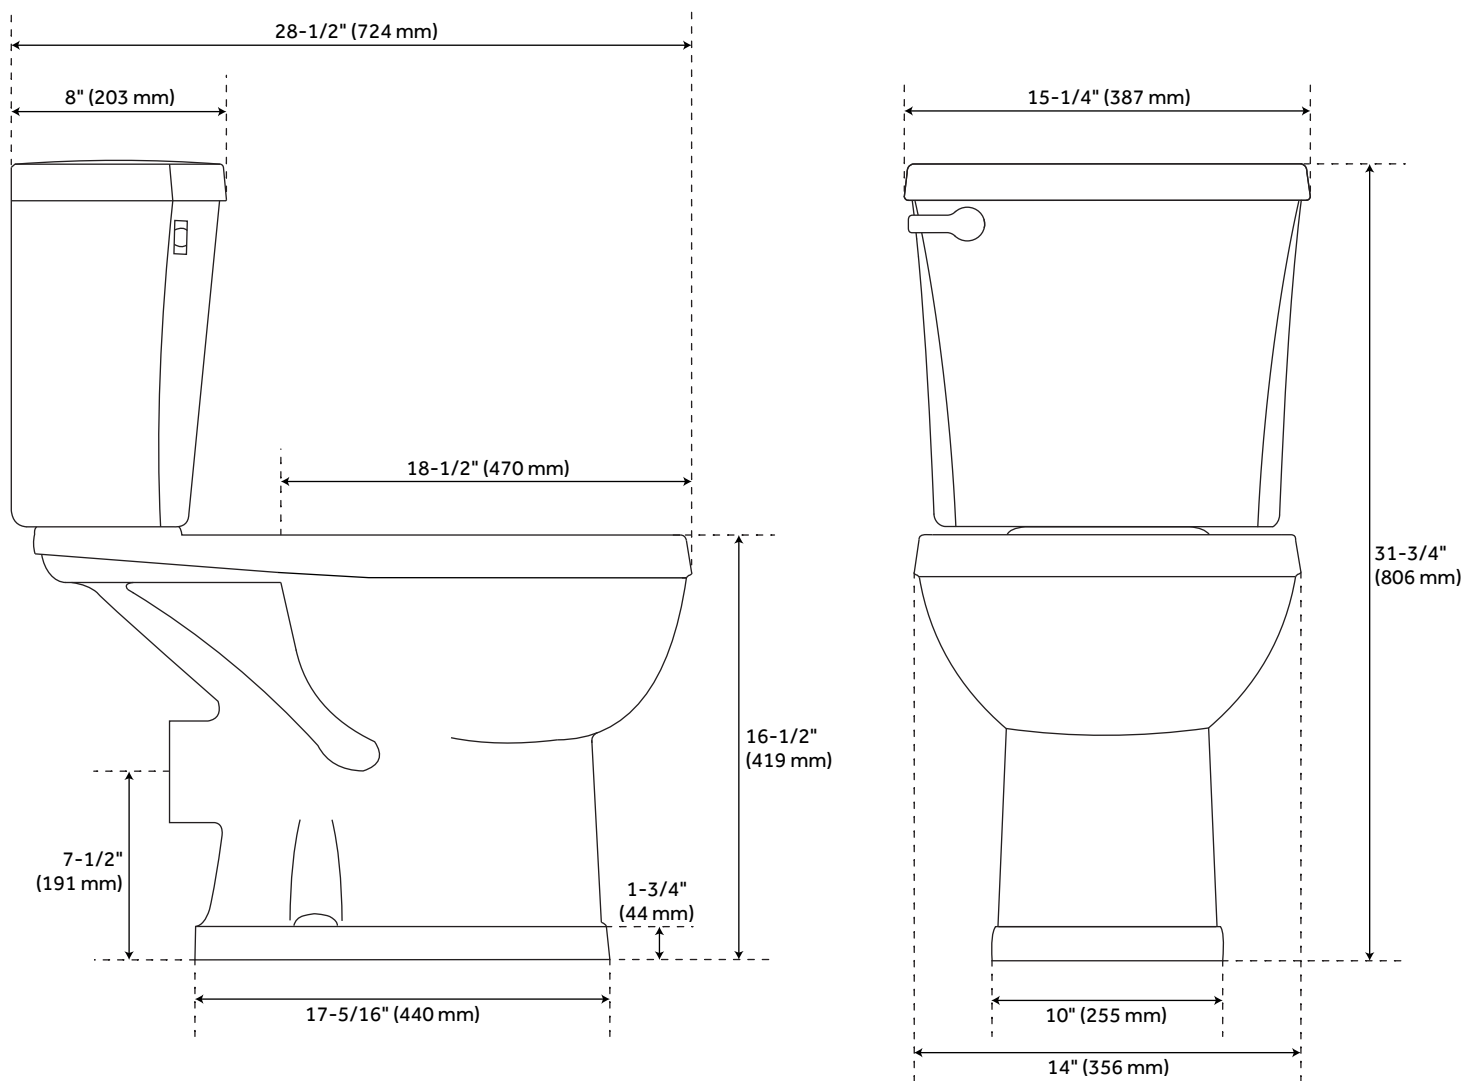


All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

STANDARD SEAT - CONTEMPORARY ULTRA SLIM SLOW-CLOSING TOILET SEAT

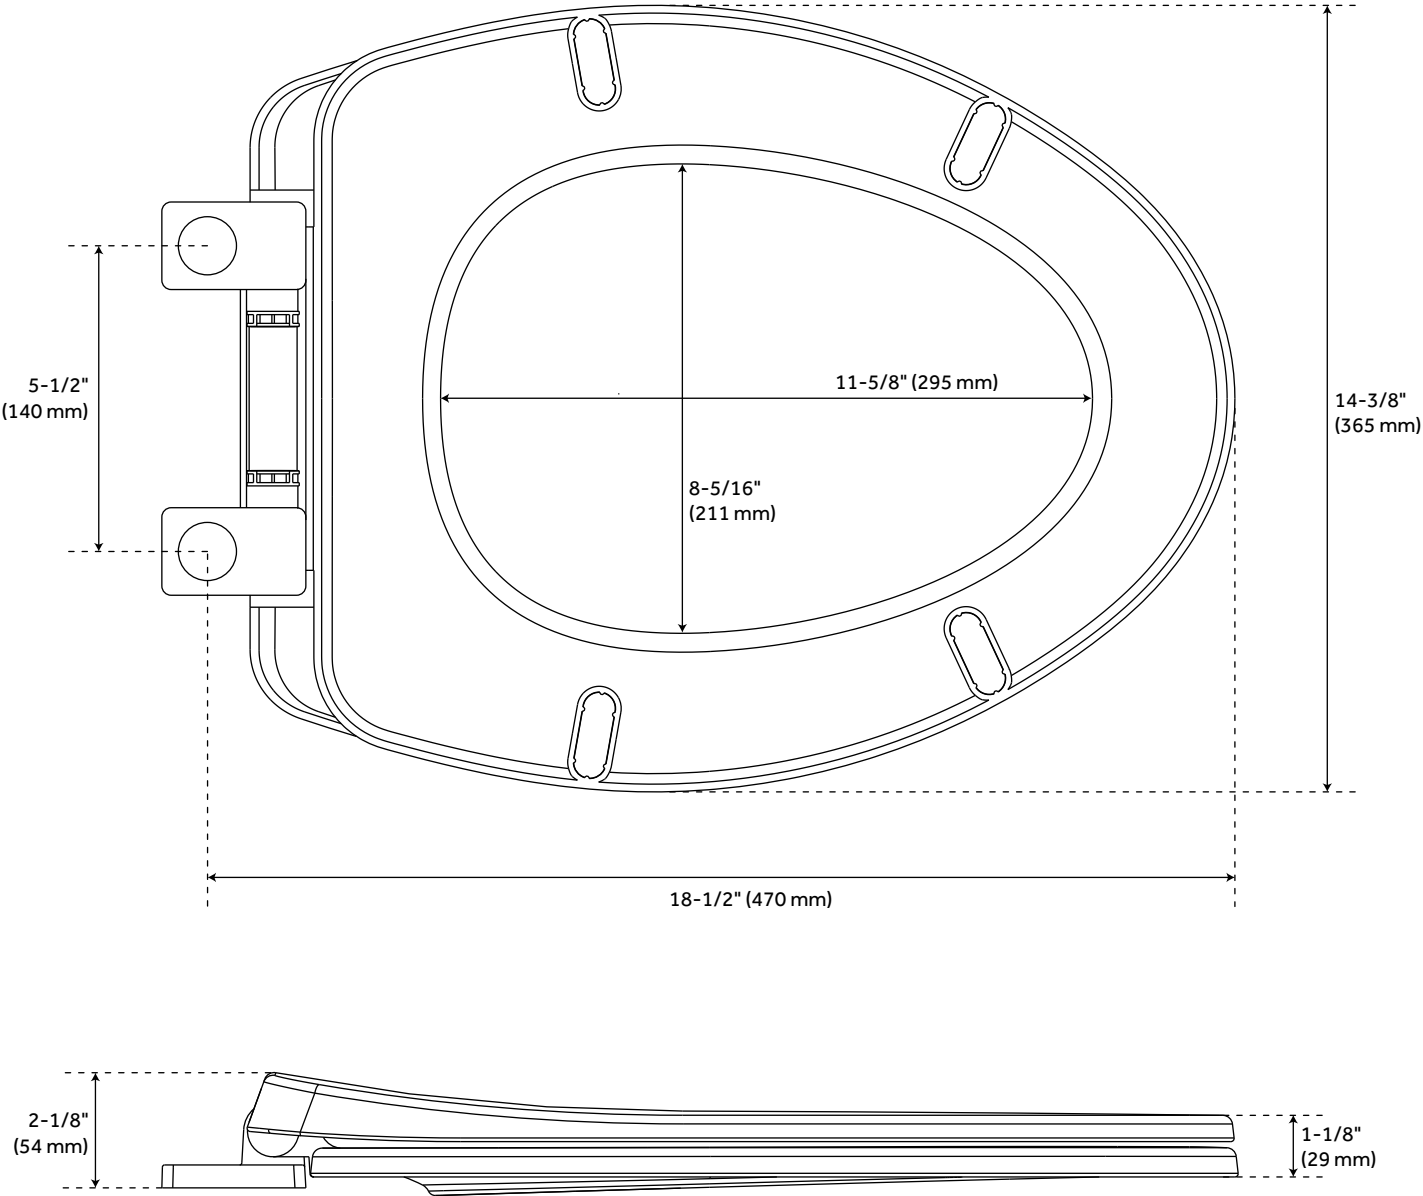

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

OPTIONAL ALDRIDGE ELONGATED ELECTRONIC BIDET TOILET SEAT

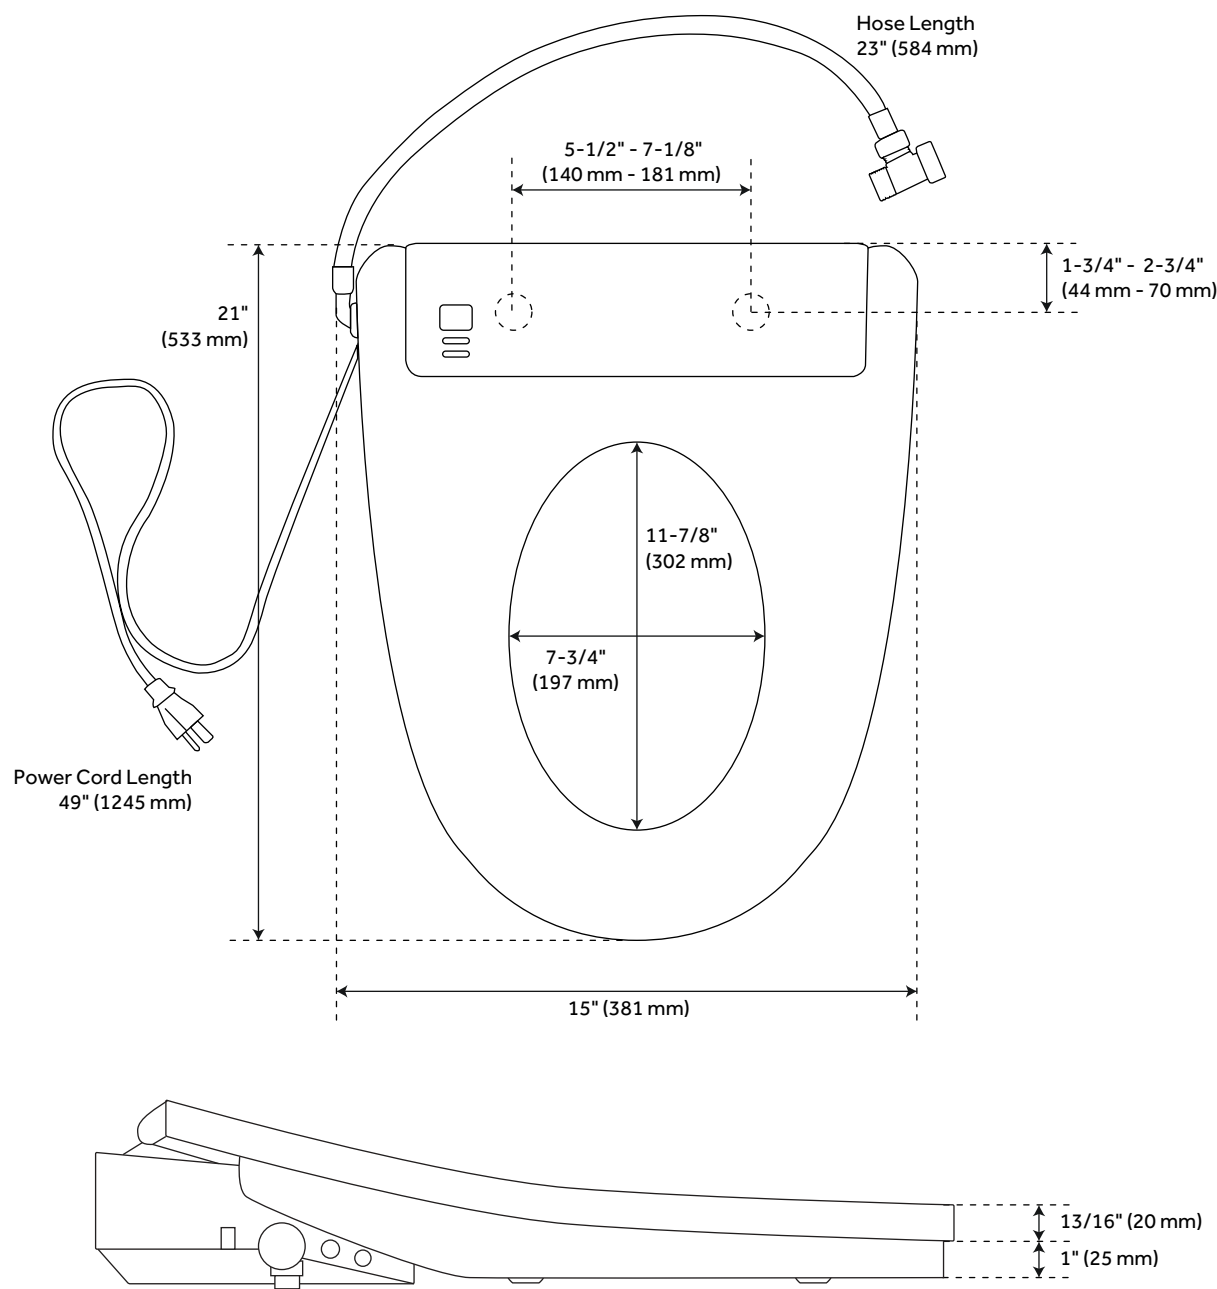

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.