HIBISCUS PRESSURE BALANCE TUB AND SHOWER SYSTEM

SKU: 953890

Code: SHHB8010,SH4001,SHRSA120S,SHSH2080G,SHTS84, SHHB8010Z,SH4001,SHRSA120SZ,SHSH2080GZ,SHTS84Z,SHHB8010Z



ASME A112.18.1/CSA B125.1

ASSE 1016 Type P

CEC Listed

Massachusetts Accepted

LISTED ID: SHHB8010*, SH4001, SHRSA120S*,

SHSH2080G*, SHTS84*



FEATURES

Mounting Hardware Included: Yes

Assembly Required: No Handle Type: Lever NPT Connection: 1/2"

Shower Head Installation Type: Wall-Mount

Number of Shower Heads: 1

Shower Head Material: 304-Grade Stainless Steel

Shower Head Spray: Rainfall Shower Head Length: 11-3/4" Shower Head Width: 11-3/4" Shower Arm Included: Yes Shower Arm Extension: 12" Shower Arm Height: 2-3/8" Shower Head IPS: 1/2" Shower Head Swivel: Yes Valve Trim Width: 6-11/16" Valve Trim Height: 6-11/16" Diverter Included: Yes

Shower Head Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

HIBISCUS PRESSURE BALANCE SHOWER SYSTEM WITH SLIDE BAR AND HAND SHOWER

SKU: 953891

Code: SHHB8010,SH4001,SHRSA120S,SHSH2080G,SHHS4080G,SHH1010,SHWE2020,SHSB3050,SHHB9005,SH6103, SHHB8010Z,SH4001,SHRSA120SZ,SHSH2080GZ,SHHS4080GZ,SHH1010Z,SHWE2020Z,SHSB3050,SHHB9005Z,SH6103



ADDITIONAL FEATURES


- Metal lever handle.
- Single function 8" Rainfall shower head.
- Single function hand shower with easy-clean spray nozzles.
- 60" 72" stretchable metal shower hose.
- Included Rough-in valves:
- Pressure balance valve features a one-piece cartridge design for ease of maintenance, back-to-back capability, a ceramic disc cartridge, cast bronze valve body, adjustable temperature limit stop, a quick remove plaster guard, easy mounting brackets and integral stops.
- Ceramic cartridge.
- Diverter valve features a ceramic disc cartridge and brass valve body. An available Single-Function Diverter valve Cartridge restricts water flow to one outlet at a time.


REVISED 7/7/2023

PRESSURE BALANCE TUB AND SHOWER ROUGH-IN VALVE

SKU: 446520

SH4001

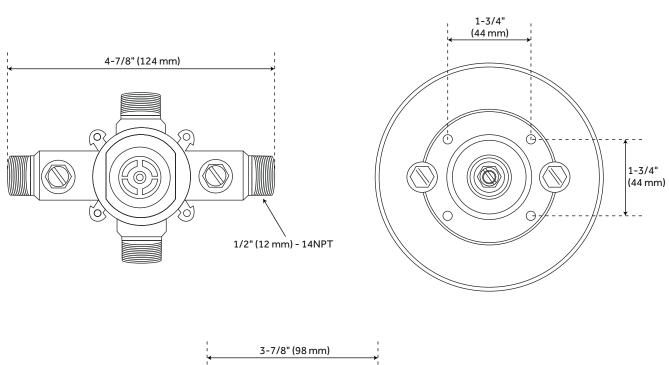




All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

MODERN SQUARE WALL-MOUNT SHOWER ARM WITH FLANGE

SKU: 948956


SHRSA120S, SHRSA120SZ, SHRSA180S, SHRSA180Z

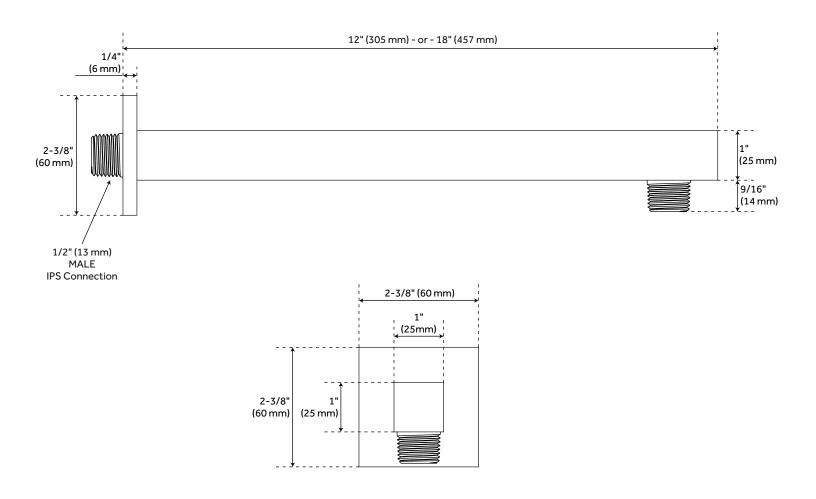


All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

HIBISCUS TUB SPOUT WITH DIVERTER

SKU: 948968 SHTS84

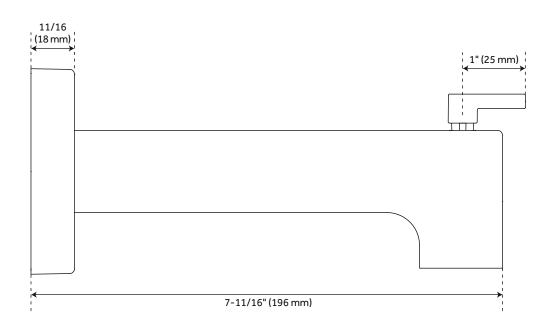



All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

HIBISCUS PRESSURE BALANCE SHOWER SYSTEM WITH SLIDE BAR AND HAND SHOWER

SKU: 953891

Code: SHHB8010,SH4001,SHRSA120S,SHSH2080G,SHHS4080G,SHH1010,SHWE2020,SHSB3050,SHHB9005,SH6103, SHHB8010Z,SH4001,SHRSA120SZ,SHSH2080GZ,SHHS4080GZ,SHH1010Z,SHWE2020Z,SHSB3050,SHHB9005Z,SH6103



ASME A112.18.1/CSA B125.1

ASSE 1016 Type P
ICC/ANSI A117.1
CEC Listed

Massachusetts Accepted
LISTED ID: SHHB8010*, SH4001, SHRSA120S*,
SHSH2080G*, SHHS4080G*, SHH1010*, SHWE2020*,
SHHB9005*, SH6103







FEATURES

Mounting Hardware Included: Yes

Assembly Required: No Handle Type: Lever NPT Connection: 1/2"

Shower Head Installation Type: Wall-Mount

Number of Shower Heads: 1

Shower Head Material: 304-Grade Stainless Steel

Shower Head Spray: Rainfall Shower Head Length: 11-3/4" Shower Head Width: 11-3/4" Shower Arm Included: Yes Shower Arm Extension: 12" Shower Arm Height: 2-3/8" Shower Head IPS: 1/2" Shower Head Swivel: Yes Valve Trim Width: 6-11/16" Valve Trim Height: 6-11/16" Slide Bar Length: 30"

Hand Shower Length: 8-7/16" Hand Shower Hose Length: 60" Hand Shower Material: Brass

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Diverter Included: Yes

Shower Head Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

HIBISCUS PRESSURE BALANCE TUB AND SHOWER SYSTEM

SKU: 953890

Code: SHHB8010,SH4001,SHRSA120S,SHSH2080G,SHTS84, SHHB8010Z,SH4001,SHRSA120SZ,SHSH2080GZ,SHTS84Z,SHHB8010Z



ADDITIONAL FEATURES

- Single function shower head.
- Tub spout diverter.
- Slip-fit tub spout.
- Included Rough-in valve:
- Pressure balance valve with integral stops.
- One-piece cartridge design for ease of maintenance.
- Back-to-back capability.
- Ceramic disc valve cartridge.
- Cast bronze valve body.
- Adjustable temperature limit stop.
- Quick remove plaster guard.
- Easy mounting brackets.