HIBISCUS SIMPLE SELECT SHOWER SYSTEM WITH DUAL SHOWERHEADS

SKU: 953901

Code: SHHB8040,SH5001SSG,SHRSA120S,SHSH2080G, SHHB8040Z,SH5001SSG,SHRSA120SZ,SHSH2080GZ



FEATURES

Mounting Hardware Included: Yes Assembly Required: No Handle Type: Lever NPT Connection: 1/2" Shower Head Installation Type: Wall-Mount Number of Shower Heads: 2 Shower Head Material: 304-Grade Stainless Steel Shower Head Spray: Rainfall Shower Head Length: 11-3/4" Shower Head Width: 11-3/4" Shower Arm Included: Yes Shower Arm Extension: 12" Shower Arm Height: 2-3/8" Shower Head IPS: 1/2" Shower Head Swivel: Yes Valve Trim Width: 7-1/8" Valve Trim Height: 7-1/8" **Diverter Included: Yes** Shower Head Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

ASME A112.18.1/CSA B125.1 ASSE 1016 Type P ICC/ANSI A117.1 CEC Listed Massachusetts Accepted LISTED ID: SHHB8040*, SH5001SSG, SHRSA120S*, SHSH2080G*



REVISED 7/7/2023

HIBISCUS SIMPLE SELECT SHOWER SYSTEM WITH DUAL SHOWERHEADS

SKU: 953901

Code: SHHB8040,SH5001SSG,SHRSA120S,SHSH2080G, SHHB8040Z,SH5001SSG,SHRSA120SZ,SHSH2080GZ




ADDITIONAL FEATURES

- Dual functionality allows for one or both shower features to run at a time.
- Single function shower head (full spray) with easy-clean silicone nozzles.
- 60" 72" stretchable metal shower hose.
- Solid brass shower arm.
- Single function hand shower (full spray).
- Hand shower dimensions: 8-7/16" L x 1-3/8" W x 9/16" D.
- Optional Rough-in Valve:
 - Pressure balanced with integral stops.
 - One-piece cartridge design for ease of maintenance.
 - Back-to-back capability.
 - Adjustable temperature limit stop.
 - Cast bronze body.
 - Quick remove plaster guard.
 - Easy mounting brackets.
 - Valve Dimensions: 4-7/8" L x 4-3/8" W x 5-1/2" D.

BEVELED SQUARE RAINFALL SHOWER HEAD

SKU: 920860

		8" (203 mm)			- or -		2" mm)	- or - 15-3/4" (400 mm)					
$\left \right $													
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
$\overline{\ }$													

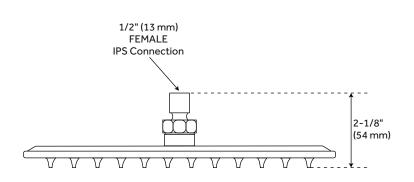

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.




See Website For Warranty Information signaturehardware.com/warranty

signature hardware.com

MODERN SQUARE WALL-MOUNT SHOWER ARM WITH FLANGE

SKU: 948956

SHRSA120S, SHRSA120SZ, SHRSA180S, SHRSA180Z

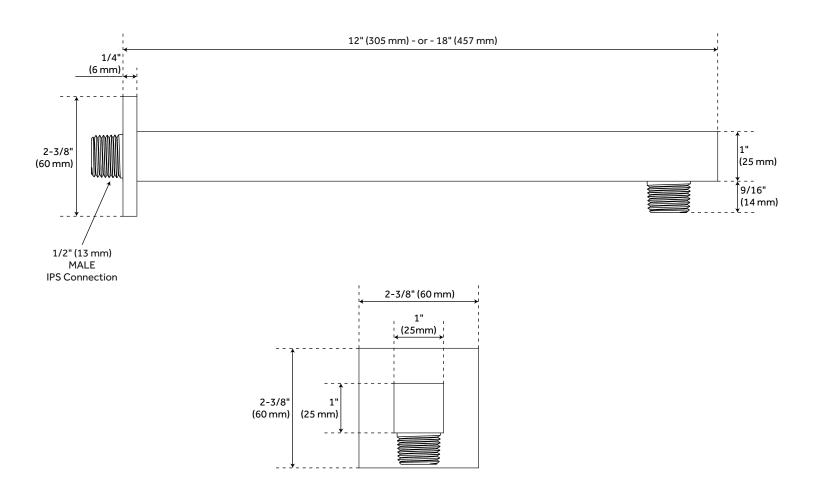


All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.



See Website For Warranty Information signaturehardware.com/warranty

HIBISCUS SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948974 SHHB8040, SHHB8040Z

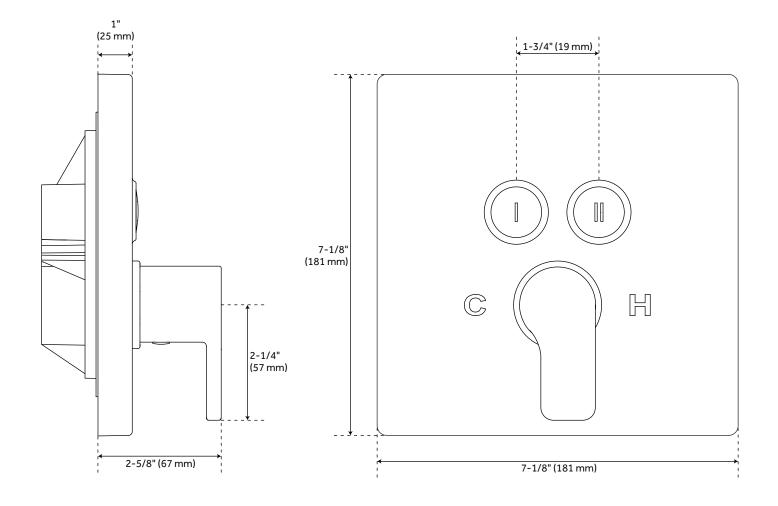


All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.




See Website For Warranty Information signaturehardware.com/warranty

HIBISCUS OPTIONAL PRESSURE BALANCE ROUGH-IN VALVE

SKU: 948974 SH5001SSG





STANDARD:

Pressure (psi)			40	60	80
	Total (gpm)	3.4	5	6.3	7.4
Simultaneous (Both Valves Open)	Outlet A (gpm)	1.2	2.2	2.9	3.5
	Outlet B (gpm)	2.2	2.8	3.4	3.9
Separate	Outlet A (gpm)	2.5	3.9	4.8	5.5
(A or B Closed)	Outlet B (gpm)	2.5	3.9	4.8	5.5

WITH FLOW RESTRICTOR:

Pressure (psi)			40	60	80
	Total (gpm)	1.20	1.40	1.53	1.64
Simultaneous (Both Valves Open)	Outlet A (gpm)	0.43	0.56	0.64	0.68
	Outlet B (gpm)	0.77	0.84	0.89	0.96
Separate	Outlet A (gpm)	1.17	1.38	1.49	1.59
(A or B Closed)	Outlet B (gpm)	1.16	1.39	1.49	1.60

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

