

# HOLLYBROOK THERMOSTATIC EXPOSED PIPE SHOWER WITH HAND SHOWER

SKU: 953952

Code: SH485649, SH485648, SH485647



## FEATURES

Material: Metal

Shower Head Swivel: Yes

Hand Shower Flow Rate: 1.75 gpm (6.6 L/min) @ 80 psi

Diverter Outlets: 2

Cartridge Type: Thermostatic

Faucet Centers: 5-9/10"

ASME A112.18.1/CSA B125.1, ASSE 1016 Type T, CEC Listed, WaterSense by CSA, Massachusetts Accepted, LISTED  
ID: SH441121CP, SH441121BN, SH441121MB



## ADDITIONAL FEATURES


- Thermostatic and pressure balanced. Keeps shower temperature  $\pm 1$  degree Celsius.
- Equipped with backflow prevention.
- Includes 3 function hand shower (full spray, massage spray, full and massage spray), flexible spiral type hose, and wall mount cradle.
- Includes two 1-3/4" wall-mount couplers and decorative slip joint coupler.
- Included Thermostatic rough-in valve features scald guard protection, high temperature limit stop, integral water stops and check valve, a ceramic cartridge, and a bronze valve body.
- Temperature outlet factory calibrated to 100 degrees Fahrenheit and can be easily adjusted up or down to user's comfort level.
- 2-way diverter features 1/2" IPS inlets, and controls water flow between 2 shower outlets.

REVISED 6/28/2024

# HOLLYBROOK THERMOSTATIC EXPOSED PIPE SHOWER WITH HAND SHOWER

SKU: 953952

Code: SH485649, SH485648, SH485647

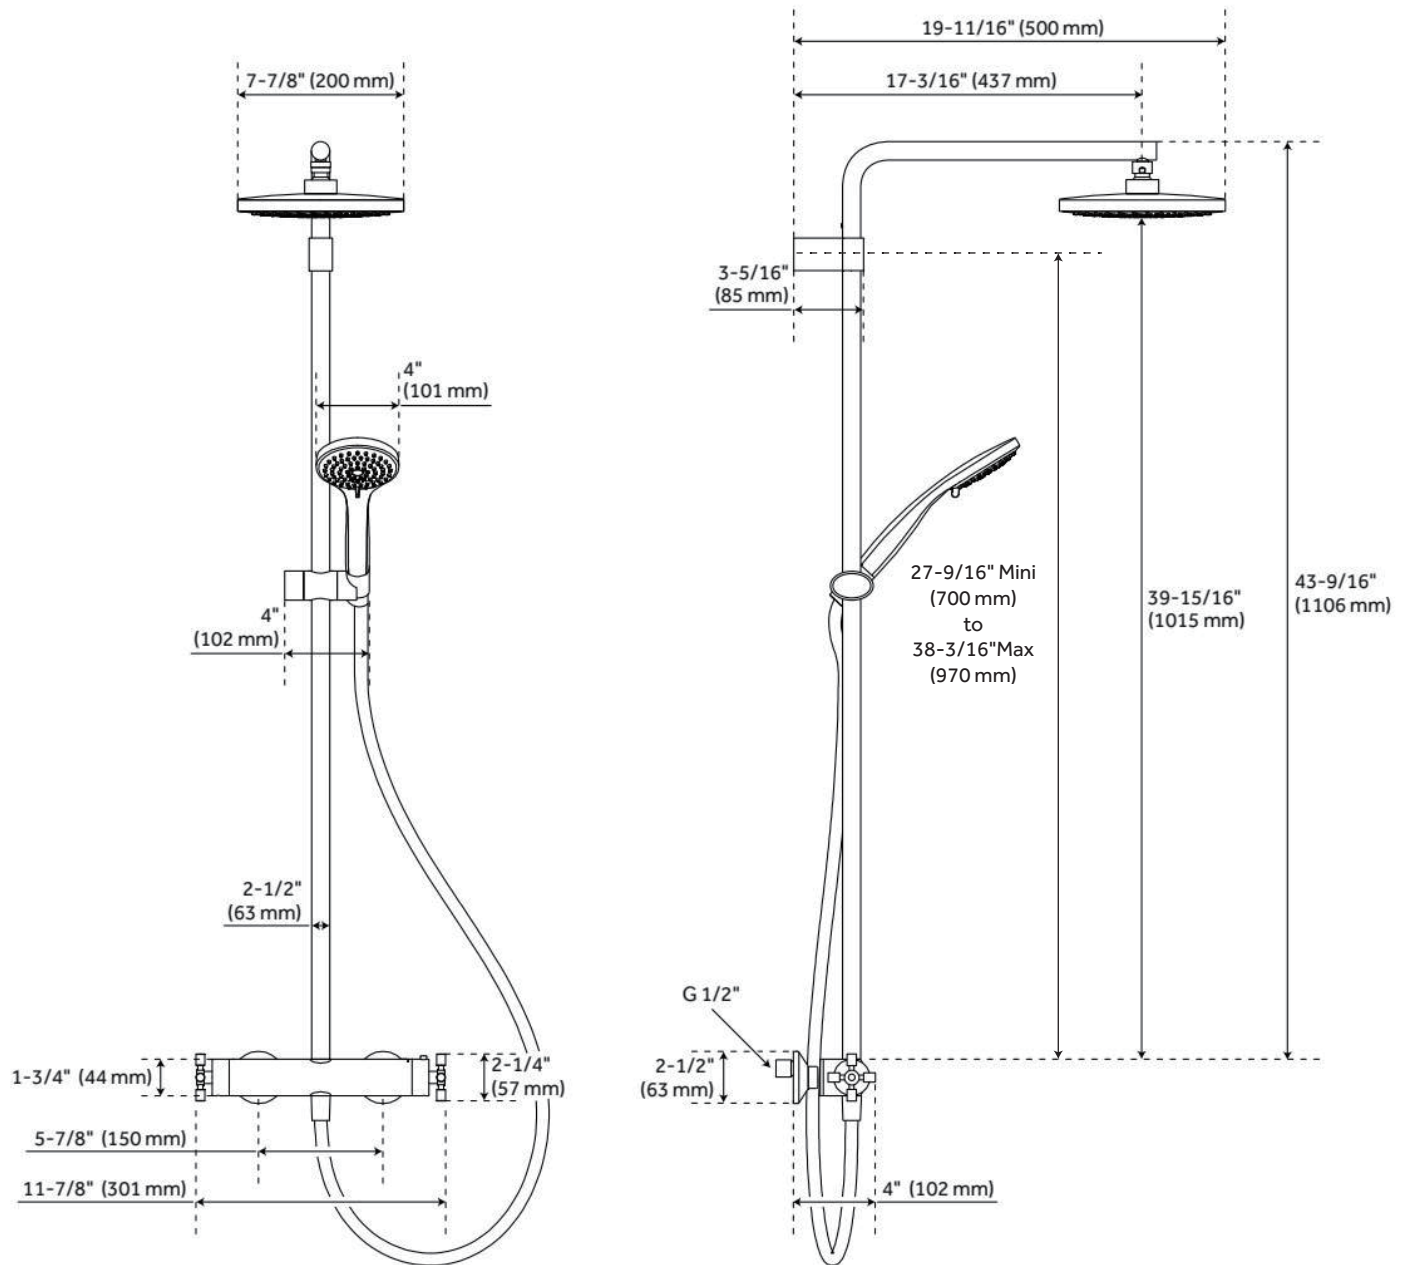

REVISED 6/28/2024