

# CASTOR

## SINGLE HOLE KITCHEN FAUCET

SKU: 941493

### BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing plumbing fixtures. Signature Hardware accepts no liability for any damage to the faucet, plumbing, sink, counter top, or for personal injury during installation.

Observe all local plumbing and building codes.

Unpack and inspect the faucet for shipping damage. If any damage is found, contact our Customer Relations team at 1-866-855-2284.

### GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For these instructions, it is assumed that the old faucet has been completely removed and any necessary repairs or modifications to the water supply have been completed.

### TOOLS AND MATERIALS:



Plumbers  
Tape



Thread  
Sealant



Phillips  
Screwdriver



Adjustable  
Wrench



Small  
Bucket

For Warranty information, please visit: [signaturehardware.com/services/warranty](https://signaturehardware.com/services/warranty)

REVISED 11/02/2020  
CODES: 507704, 507703, 532392

# CASTOR


## SINGLE HOLE KITCHEN FAUCET

SKU: 941493


### INSTALLATION

1. Ensure that the water supply below your sink is completely shut off by turning the shutoff valves all the way to the right.


**Tip:** Place a small bucket below your workspace to catch any water that may drip during the installation process.




2. Remove the lock nut, metal washer, and rubber washer from the threaded shank.

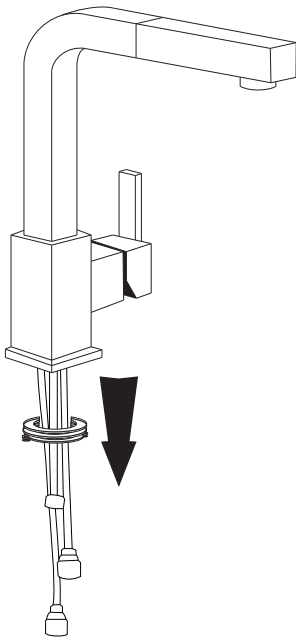

3. Insert the faucet into its mounting hole. From below, slide the rubber washer followed by the metal washer onto the shank. Thread the locknut onto the shank until hand-tight. Finish tightening using an adjustable wrench or basin wrench.

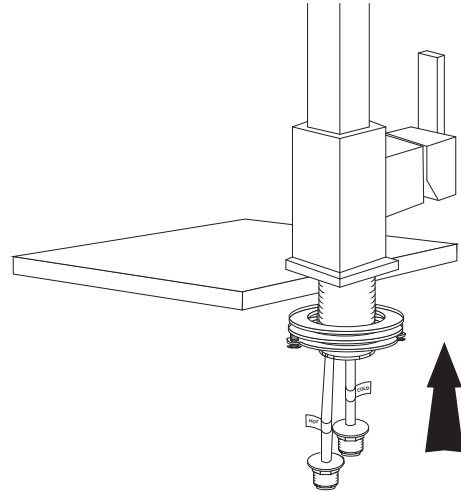

4. Attach the sprayer hose to its copper supply tube as shown. Insert the provided rubber O-ring into the lock nut before securing. Apply a bit of thread sealant or plumber's tape to the threads before tightening. Be very careful not to overtighten.

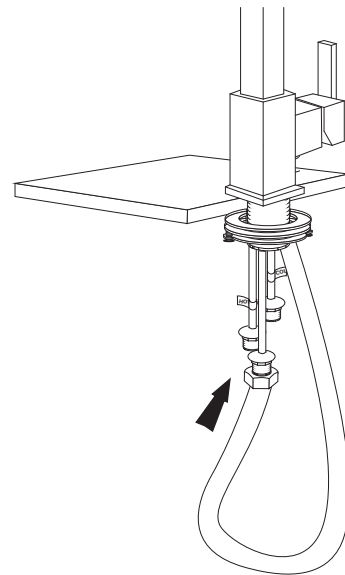


# CASTOR


## SINGLE HOLE KITCHEN FAUCET

SKU: 941493

5. Attach the weight for the hand shower hose to the lowest point of the hose, as shown below.

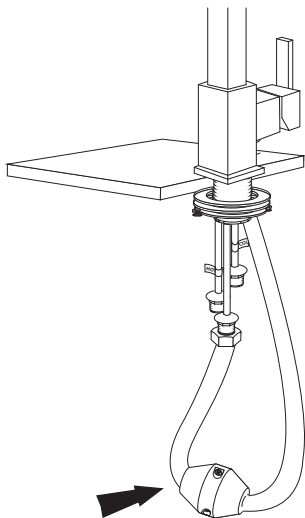

6. Attach your main water lines to the copper supply tubes on the faucet. Ensure that you are connecting the hot and cold in accordance with the labels on the supply posts. Apply a bit of thread sealant or plumber's tape to the threads before tightening. Be very careful not to overtighten.

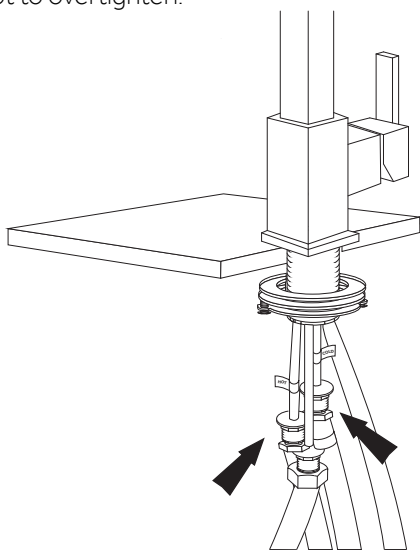

7. Once installation is complete, turn the main water supply back on from underneath your sink. Check for any leaks.



8. Turn the faucet on and ensure that there are no leaks. Check to ensure that both hot and cold water are running properly. Turn on the hand sprayer function and allow the sprayer to run for another 60 seconds, and check for any leaks.

