PROVINCETOWN SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948975

Code: SHPR8040, SHPR8040, SH5001SSG, SHPR8040, SH5001SSG



FEATURES

Installation Type: Wall Mount Features: Pressure-Balanced Design: Modern Material: Brass Assembly Required: No Shape: Round Handle Type: Lever Installation Type: Wall Mount NPT Connection: 1/2" Valve Trim Width: 7-1/2" Valve Trim Height: 7-1/2" Valve Trim Diameter: 7-1/2" Diverter Included: Yes Diverter Outlets: 2

ASME A112.18.1/CSA B125.1

PROVINCETOWN SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948975

Code: SHPR8040, SHPR8040, SH5001SSG, SHPR8040, SH5001SSG




ADDITIONAL FEATURES

- Dual functionality allows for one or both shower features to run at a time.
- Optional Rough-in Valve:
 - Pressure balanced with integral stops.
 - One-piece cartridge design for ease of maintenance.
 - Back-to-back capability.
 - Adjustable temperature limit stop.
 - Cast bronze body.
 - Quick remove plaster guard.
 - Easy mounting brackets.
 - Valve Dimensions: 4-7/8" L x 4-3/8" W x 5-1/2" D .

PROVINCETOWN SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER VALVE

SKU: 948975 SHPR8040, SHPR8040Z

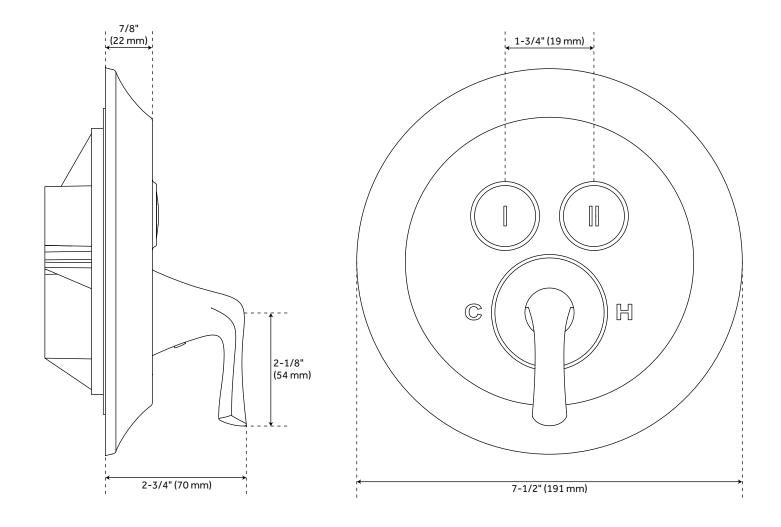

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.




See Website For Warranty Information signaturehardware.com/warranty


signature hardware.com

PROVINCETOWN OPTIONAL PRESSURE BALANCE ROUGH-IN VALVE

SKU: 948975 SH5001SSG



Water Outlet A

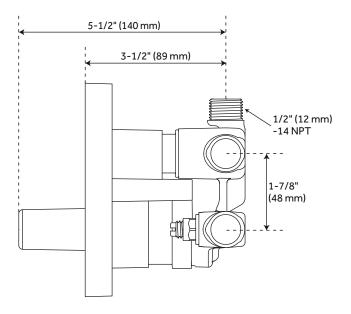


STANDARD:

| Pressure (psi) | | 20 | 40 | 60 | 80 |
|------------------------------------|----------------|-----|-----|-----|-----|
| Simultaneous (Both Valves Open) | Total (gpm) | 3.4 | 5 | 6.3 | 7.4 |
| | Outlet A (gpm) | 1.2 | 2.2 | 2.9 | 3.5 |
| | Outlet B (gpm) | 2.2 | 2.8 | 3.4 | 3.9 |
| Separate (A or B Closed) | Outlet A (gpm) | 2.5 | 3.9 | 4.8 | 5.5 |
| | Outlet B (gpm) | 2.5 | 3.9 | 4.8 | 5.5 |

WITH FLOW RESTRICTOR:

| Pressure (psi) | | 20 | 40 | 60 | 80 |
|------------------------------------|----------------|------|------|------|------|
| Simultaneous (Both Valves Open) | Total (gpm) | 1.20 | 1.40 | 1.53 | 1.64 |
| | Outlet A (gpm) | 0.43 | 0.56 | 0.64 | 0.68 |
| | Outlet B (gpm) | 0.77 | 0.84 | 0.89 | 0.96 |
| Separate (A or B Closed) | Outlet A (gpm) | 1.17 | 1.38 | 1.49 | 1.59 |
| | Outlet B (gpm) | 1.16 | 1.39 | 1.49 | 1.60 |



Water Outlet B

