HIBISCUS SIMPLE SELECT SHOWER SYSTEM WITH RAINFALL SHOWER AND HAND SHOWER

SKU: 949742

Code: SHHB8040, SHRSC40S, SHRS1025S, SHH1010, SHHS4080G, SHSB3050, SHWE2020, SH5001SSG



FEATURES

Features: Hand Shower Included; Pressure-Balanced

Design: Modern Material: Brass

Base Plate Height: 7-1/8"

Mounting Hardware Included: Yes

Assembly Required: Yes

Shape: Square Handle Type: Lever Base Plate Width: 7-1/8" NPT Connection: 1/2"

Shower Head Installation Type: Ceiling Shower Head Material: Stainless Steel

Shower Head Spray: Rainfall Shower Head Length: 10" Shower Head Width: 10" Shower Arm Included: Yes Shower Arm Height: 4" Shower Head IPS: 1/2" Shower Head Swivel: Yes Valve Trim Width: 7-1/8" Valve Trim Height: 7-1/8" Hand Shower Hose Length: 60"

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Water Connection Included: Yes

Diverter Included: Yes Diverter Outlets: 2

Shower Head Flow Rate: 2.5 gpm (9.5 L/min) @ 80 psi

HIBISCUS SIMPLE SELECT SHOWER SYSTEM WITH RAINFALL SHOWER AND HAND SHOWER

SKU: 949742

Code: SHHB8040, SHRSC40S, SHRS1025S, SHH1010, SHHS4080G, SHSB3050, SHWE2020, SH5001SSG




ADDITIONAL FEATURES

- Dual functionality allows for one or both shower features to run at a time.
- Single function shower head (full spray) with easy-clean silicone nozzles.
- 60" 72" stretchable metal shower hose.
- Solid brass shower arm.
- Single function hand shower (full spray).
- Hand shower dimensions: 8-7/16" L x 1-3/8" W x 9/16" D.
- Optional Rough-in Valve:
 - Pressure balanced with integral stops.
 - One-piece cartridge design for ease of maintenance.
 - · Back-to-back capability.
 - Adjustable temperature limit stop.
 - Cast bronze body.
 - Quick remove plaster guard.
 - · Easy mounting brackets.
 - Valve Dimensions: 4-7/8" L x 4-3/8" W x 5-1/2" D.


HIBISCUS SIMPLE SELECT 2-WAY PRESSURE BALANCE SHOWER TRIM


SKU: 949742 SHHS4080G

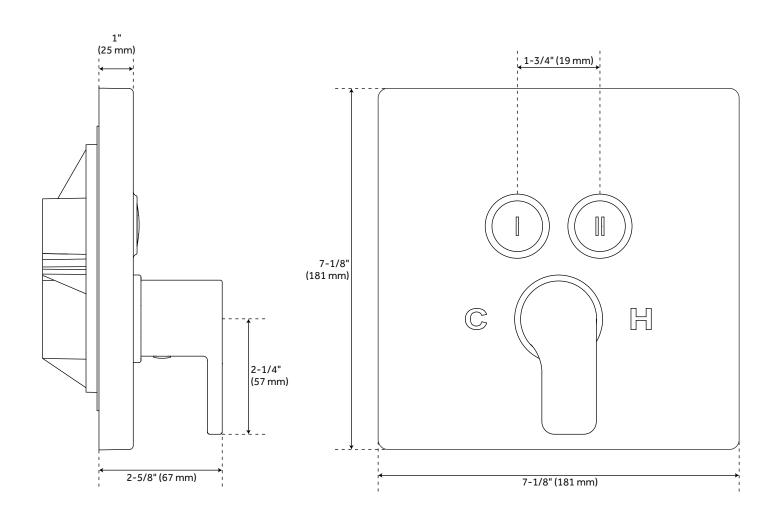


HIBISCUS OPTIONAL PRESSURE BALANCE ROUGH-IN VALVE

SKU: 949742 SH5001SSG





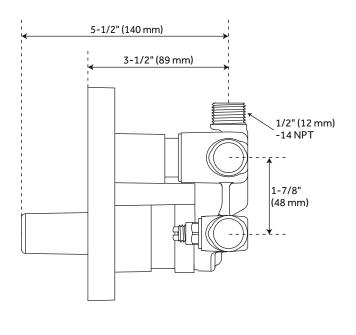

STANDARD:


Pressure (psi)		20	40	60	80
Simultaneous (Both Valves Open)	Total (gpm)	3.4	5	6.3	7.4
	Outlet A (gpm)	1.2	2.2	2.9	3.5
	Outlet B (gpm)	2.2	2.8	3.4	3.9
Separate (A or B Closed)	Outlet A (gpm)	2.5	3.9	4.8	5.5
	Outlet B (gpm)	2.5	3.9	4.8	5.5


WITH FLOW RESTRICTOR:

Pressure (psi)		20	40	60	80
Simultaneous (Both Valves Open)	Total (gpm)	1.20	1.40	1.53	1.64
	Outlet A (gpm)	0.43	0.56	0.64	0.68
	Outlet B (gpm)	0.77	0.84	0.89	0.96
Separate (A or B Closed)	Outlet A (gpm)	1.17	1.38	1.49	1.59
	Outlet B (gpm)	1.16	1.39	1.49	1.60

HIBISCUS SQUARE RAINFALL SHOWER HEAD


SKU: 949742 SHRS1025S

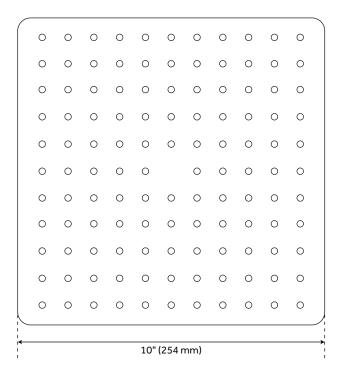


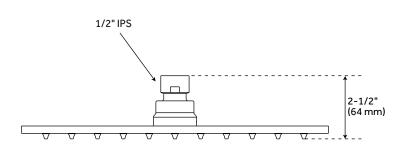

HIBISCUS CEILING-MOUNT SHOWER ARM

SKU: 949742 SHRSC40S

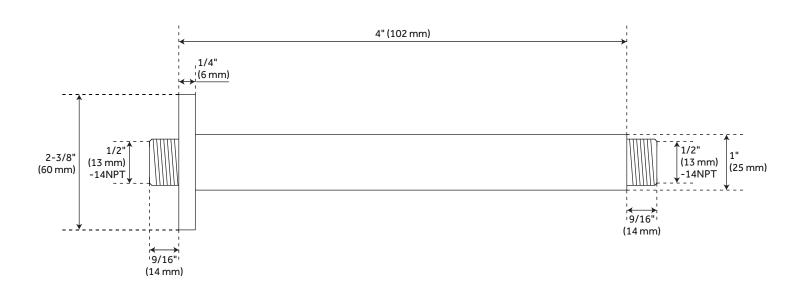




HIBISCUS HAND SHOWER


SKU: 949742 SHHB8040G



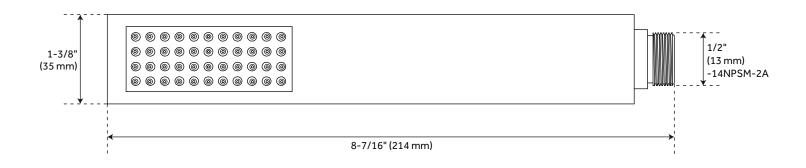


HIBISCUS 30" SLIDE BAR


SKU: 949742 SHSB3050

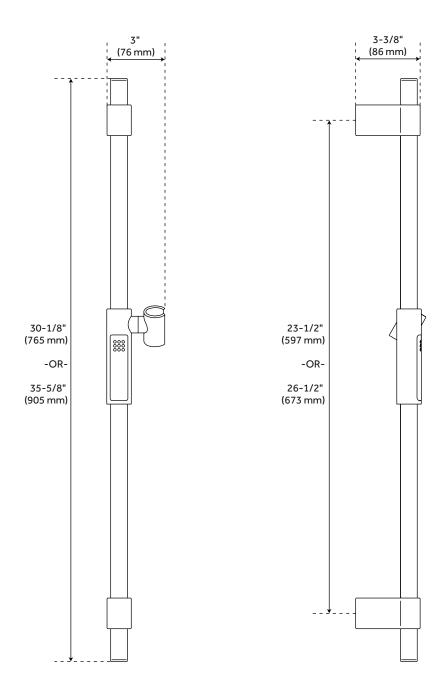

HIBISCUS METAL HAND SHOWER HOSE

SKU: 949742 SHH1010

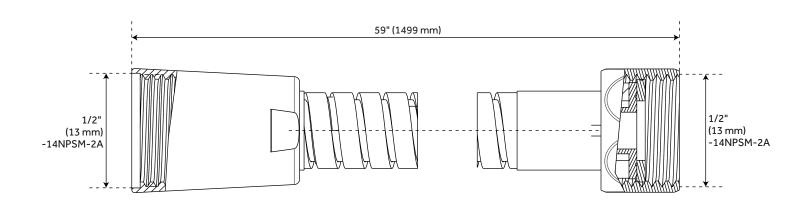



HIBISCUS SQUARE WATER SUPPLY ELBOW

SKU: 949742 SHWE2020

