


SIMPLE SELECT PRESSURE BALANCE ROUGH-IN VALVE

Product Code: SH5001SSG

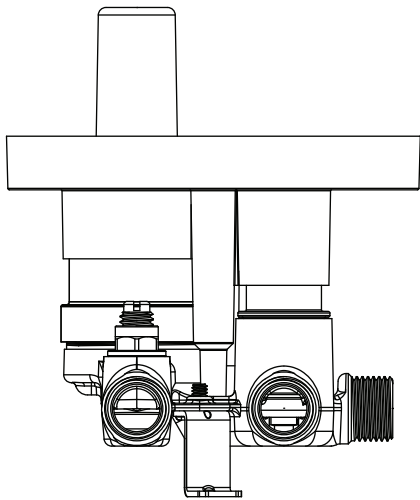

Product Features

- Cast brass valve body
- 1/2" MIP or SWT with integral stops
- Ceramic disc cartridge
- Diverter outlets: 2
- Dual functionality allows for one or both shower features to run at a time
- Back-to-back capability
- Adjustable temperature limit stop
- Quick remove plaster guard

Product Dimensions

- Length: 5-3/8 "
- Depth : 5-1/8 "
- Features: Pressure Balanced
- Connection type: 1/2NPT

Optional Accessories

ACF4001AIR -air test cap

- Flow rate

STANDARD:

PRESSURE (psi)		20	40	60	80
Simultaneous (Both Valves Open)	TOTAL (gpm)	3.4	5	6.3	7.4
	Outlet A (gpm)	1.2	2.2	2.9	3.5
	Outlet B (gpm)	2.2	2.8	3.4	3.9
Separate (A or B Closed)	Outlet A (gpm)	2.5	3.9	4.8	5.5
	Outlet B (gpm)	2.5	3.9	4.8	5.5

WITH FLOW RESTRICTOR:

PRESSURE (psi)		20	40	60	80
Simultaneous (Both Valves Open)	TOTAL (gpm)	1.20	1.40	1.53	1.64
	Outlet A (gpm)	0.43	0.56	0.64	0.68
	Outlet B (gpm)	0.77	0.84	0.89	0.96
Separate (A or B Closed)	Outlet A (gpm)	1.17	1.38	1.49	1.59
	Outlet B (gpm)	1.16	1.39	1.49	1.60

Codes and Certifications




- cUPC/IAPMO listed
- Meets ASME A112.18.1 /CSA B125.1
- Meets or exceeds ASSE 1016-P standards(anti-scald)

Revised: 10/15/25

SIMPLE SELECT PRESSURE BALANCE ROUGH-IN VALVE

Product Code: SH5001SSG

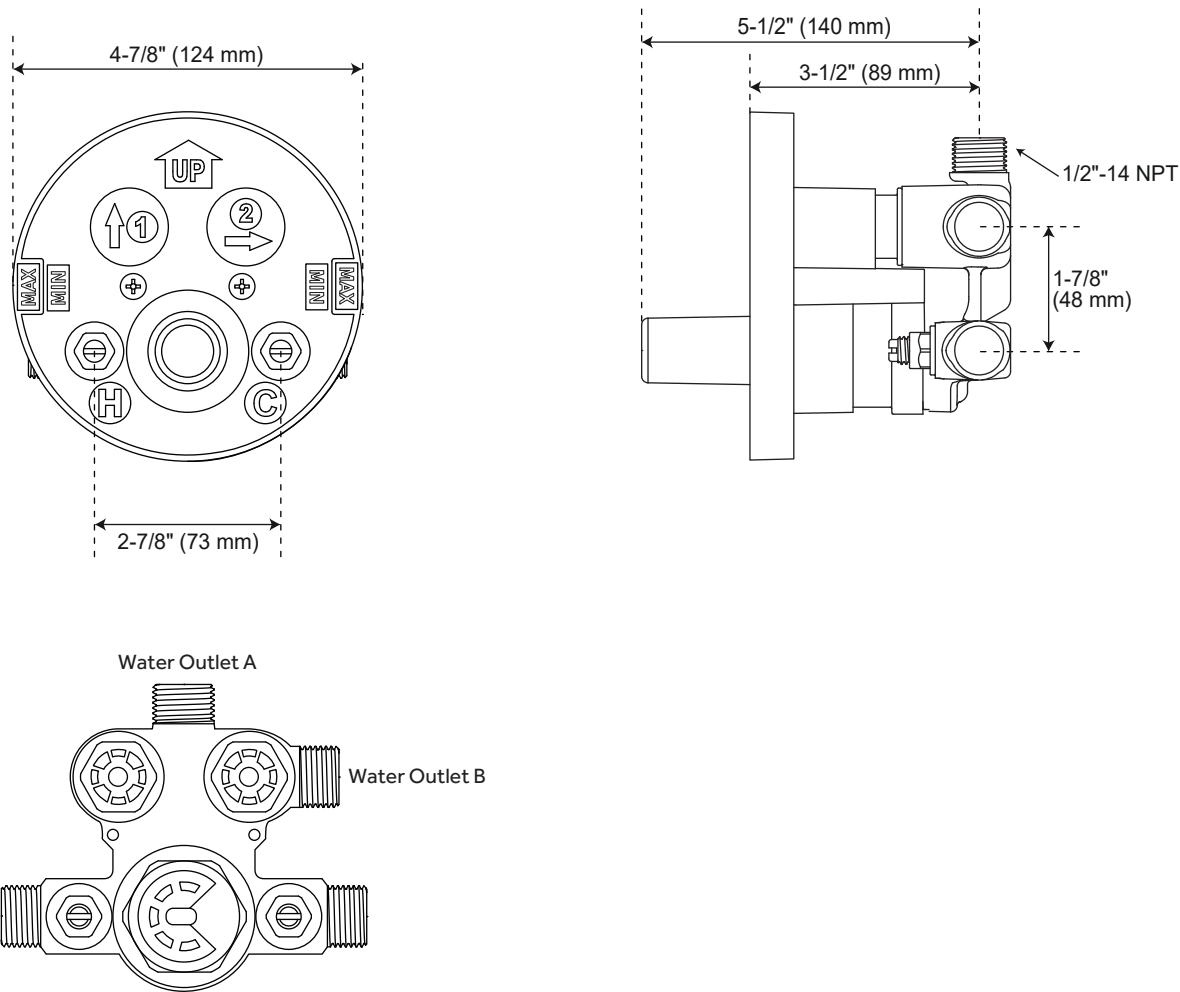

All dimensions and specifications are nominal and may vary. Use actual products for accuracy.

Revised: 10/14/25